ICE GLOBAL NETWORK & COLOCATION

TECHNICAL SPECIFICATIONS

April 2020

STATUS

Version 3.3

1.1 About This Document

The information contained in this document can be used as a technical reference guide for cutomers to facilitate connectivity and access to the ICE and NYSE markets, as well as access to services from other global and third party services available via the ICE Global Network. The document also provides information on our Liquidity Center customer colocation services within the NYSE datacenter in Mahwah, New Jersey and our low latency network connectivity options.

The following services are outlined in this document:

Colocation Services

- Kilowatt and Cabinet
- Partial Cabinet Solutions
- Power Not Used (PNU)
- Hosting Services
- Timing Services
- Meet Me Room (MMR) Services

High Availability & Colocation Network Services

- Liquidity Center Network (LCN)
- IP Liquidity Center (SLC)
- Liquidity Center Cross Connect (LCX)
- HA Direct Connect (SDC)
- HA 40G SDC Bundle
- HA Limited Service Port (LSP)
- HA Virtual Control Circuit (VCC) – (MPLS based L2VPN)
- ICE Gobal Network Optic
- ICE Global Network VPN Access – IP based VPN

Low Latency Connectivity Services

- ICE Global Network Low Latency Network (LLN)
- ICE Global Network Wireless

Application Services

- Core Application Services (NYSE Markets & National Market Systems (NMS))
- Non-Core Application Services (such as Integrated Feeds)
- Content Service Provider (CSPs, including ICE Markets)

Appendix B: "Quick Connect Sheet", provides further information for customers connecting directly to the ICE Global Network at the USLC or High Availability Access Centers. Customers connecting via a third party (e.g. an extranet provider, Application Service Provider (ASP), Metro Ethernet provider, or other) will also find some of this information applicable. However, customers that have chosen a third party for connectivity into the ICE Global Network must consult with their third party provider for interface specific information.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

1.2 Document Scope

This document specifies how customers will connect to the ICE Global Network network in order to gain access to receive or provide services. It also specifies connectivity options available to customers when connecting to the ICE and NYSE Group markets as well as between each other within the U.S. Liquidity Center (USLC) in Mahwah. It provides information associated with the first three layers of the standard OSI networking model (Physical, Data Link, and Network).

ICE Global Network provides access to the individual ICE and NYSE Group markets including, but not limited to:

- ICE Futures
- ICE Endex
- ICE Clear
- The New York Stock Exchange - Common Access Point (CAP)
- NYSE
- NYSE ARCAEquities
- NYSE Arca Options
- NYSE American Options
- NYSE Bonds
- NYSE American
- NYSE National
- National Market Systems(NMS)

ICE Global Network also provides access to the National Market Systems (NMS – OPRA & CTA) hosted in the USLC as well as to over 120 leading Equities, Options, Futures, Fixed Income and FX venues and trading services. This document is not meant to be a complete guide to the ICE Global Network network or colocation services. It does NOT specify the application level requirements for each of the services provided by ICE and DMA sourcs via ICE Global Network, i.e. it does not cover supporting services such as Domain Name Systems (DNS) resolution, authentication mechanisms, APIs, and other message based requirements. Customers will need to contact each market center/application provider directly to ensure receipt of specific documentation on message formats, authentication schemes, and any other information required to successfully connect to or receive information from individual markets.

Additionally, during provisioning, customers will receive service specific network information. This information will cover IP peering information and service addressing assignments (unicast and multicast addresses, TCP/UDP port assignments, etc.) for the relevant services ordered.

For additional information, refer to the following documents:

- US Liquidity Center Operating Policies & Procedures
- SFTI® Americas Acceptable Use Policy
- NYSE Common Access Point (CAP) Agreement (for Trading on the NYSE markets)
- NYSE Technologies Connectivity Master Network Access Services
- NYSE Technologies Connectivity Master Services Agreement

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

1.3 Contact Information

For more information on the ICE Global Network and the services available, please visit https://www.theice.com/data-services/global-network, https://www.nyse.com/publicdocs/nyse/markets/nyse/NYSE_CAP_Agreement.pdf or contact support via one of the numbers below:

For commercial or product questions:

Contact	Telephone	Email
ICE Global Network & Colocation Sales	1-212-896-2830 - Option 3 - Sales	iceglobalnetwork-Info@theice.com

Technical or operations related questions

Contact	Telephone	Email
Customer Engineering & Provisioning	**US:** +1 212 894 5488 **Europe**: +44 207 429 4530	clientprovisioning@theice.com
Network Operations	**US:** +1 770 661 0010 **Europe:** +44 203 808 6638 **APAC:** +61 3 8593 5999 **Option 1**	clientnetworks@theice.com
USLC Datacenter Operations	**1-770-661-0010 - Option 2** - Sub-Option 2	DC-Support-MAH@theice.com

1.4 Copyright Information

© 2019 Intercontinental Exchange, Inc. All rights reserved.

This document contains information that is confidential and proprietary property and/or trade secrets of Intercontinental Exchange, Inc. and/or its affiliates, is not to be published, reproduced, copied, disclosed, or used without the express written consent of Intercontinental Exchange, Inc. The information contained is, to the knowledge of Intercontinental Exchange, Inc., current as of the date hereof, but is subject to change, without notice. The information contained herein is for informational and/or reference purposes with respect to the products and services described only, does not constitute representations or warranties by Intercontinental Exchange, Inc., and does not alter the terms of any agreements that currently exist or may from time to time exist between Intercontinental Exchange, Inc. and/or its affiliates and its clients or their affiliates. Nothing herein is intended to constitute legal, tax, accounting, or other professional advice.

Intercontinental Exchange, Inc. and its affiliates do not recommend or make any representation as to possible benefits from any securities or investments, or third-party products or services. Notwithstanding anything to the contrary in this document, the information in this document is for discussion or reference purposes only and only relates to the products and services described in this document. Any agreement with respect to the products and services described herein is subject to the execution and delivery of final documents in form and substance satisfactory to Intercontinental Exchange, Inc. ICE Data Services refers to a group of products and services offered by certain Intercontinental Exchange, Inc. (NYSE:ICE) companies and is the marketing name used globally, including for Connectivity and ICE Global Network. Trademarks of Intercontinental Exchange, Inc. and/or its affiliates include: Intercontinental Exchange, ICE, ICE block design, NYSE, ICE Data Services, New York Stock Exchange, and Interactive Data.

NOTE: If you have printed or downloaded a copy of this document, make certain to check our website https://www.theice.com/data-services/global-network for an updated copy as policies might change from time to time.

1.5 Version Information

Version	Date	Comment
1.0	28 February 2016	Reinstated versioning and added new service information for Wireless and Low Latency Network
2.0	14 September 2016	Updates to section 6.2.2 LCN for greater detail on CCG vs XDP flows
2.1	8 December 2017	Updated Customer engineering, network operations contact details and LCN diagrams
2.2	8 November 2018	Updated IGN Sales Phone Number
2.3	16 July 2019	Updates to sections 6.3.2 and 6.3.4 for greater detail on HA 40Gb SR4 availability
2.4	8 August 2019	Removed reference to Basildon in section 6.4 and corrected bandwidth units in section 7.1
3.0	21 Octoboer 2019	Branding Update
3.1	29 Octoboer 2019	Updated rate limit policy for 10G LX Ports
3.2	14 April 2020	Updated LCN Latency section
3.3	30 April 2020	Added 100G High Availability Interface Specifications

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

2. Contents

TECHNICAL SPECIFICATIONS i
1.1 About This Document ii
1.2 Document Scope iii
1.3 Contact Information iv
1.4 Copyright Information iv
1.5 Version Information v

2. Contents 1

3. US Liquidity Center (USLC) – Mahwah 4
3.1 Engineering Specifications 4

4. Colocation Services 5
4.1 Kilowatts & Cabinets 5
4.1.1 Power Specification 5
4.1.2 Technical Specification 5
4.2 Partial Cabinet Solutions 7
4.3 Power Not Used (PNU) 8
4.4 Hosting Services 8
4.5 Timing Service 8
4.5.1 Network Timing Protocol (NTP) Service 8
4.5.2 Precision Time Protocol (PTP) Service 8
4.5.3 GPS 9
4.5.4 Time Service Comparison Table 10

5. High Availability 11
5.1 Overview 11
5.2 High Availability Highlights 11
5.3 Connectivity Options 11
5.4 High Availability Concepts 13
5.5 High Availability US Access Centres 13
5.6 Protocols Supported 13
5.7 Physical connectivity options 14
5.8 Security Goals 14

6. Network Connectivity Services: Detailed Specifications 15
6.1 Overview 15
6.2 Liquidity Center Network (LCN) Services 15
6.2.1 National Market Systems (NMS) over LCN 16
6.2.2 LCN Latency Information 17
6.2.3 LCN Physical Connectivity 17
6.2.4 LCN Address Space 18
6.2.5 LCN Networking Configuration 19
6.2.6 LCN Multicast 20

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

6.2.7 LCN Rate Limiting 20
6.3 High Availability Services 21
6.3.1 IP Liquidity Center (SLC) Services 21
6.3.2 IP SLC Physical Connectivity (Mahwah) 22
6.3.3 High Availability Direct Connect (SDC) Ethernet (WAN) 22
6.3.4 High Availability Physical Connectivity (SDC & LSP) 24
6.3.5 High Availability Address Space (SLC, SDC & LSP) 25
6.4 High Availability Virtual Control Circuit (VCC) 27
6.4.1 VCC Connectivity Options 27
6.5 ICE Global Network Optic 28
6.5.1 ICE Global Network Optic Physical Connectivity 29
6.5.2 ICE Global Network Optic Logical Connectivity 29
6.5.3 Optical Interfaces 30
6.5.4 Monitoring 30
6.6 ICE Global Network Optic Connect 30
6.7 Liquidity Center Cross Connect (LCX) 31
6.7.1 LCX Physical Connectivity 31
6.7.2 Administration of the Cross Connect 32
6.8 ICE Global Network VPN Access – IP based VPN 32
6.8.1 Connectivity (LAN to LAN) 33
6.8.2 ICE Global Network VPN: Network Considerations 33

7. Low Latency Services 34
7.1 Low Latency Network (LLN) 34
7.1.1 LLN Highlights 34
7.1.2 LLN Latency * 35
7.1.3 LLN Physical Connectivity 35
7.1.4 LLN Address Space 36
7.1.5 LLN Networking Configuration 36
7.1.6 Failure Considerations 36
7.2 ICE Global Network Wireless 36
7.2.1 Technology Highlights 37
7.2.2 Latency & Availability Information 38
7.2.3 IGN Wireless Circuits (Raw Bandwidth) 38
7.2.4 IGN Wireless Circuits Physical Connectivity 38
7.2.5 IGN Wireless Circuits: Network Considerations 39
7.2.6 IGN Wireless Market Data 39
7.2.7 IGN Wireless Market Data Physical Connectivity 39
7.2.8 IGN Wireless Market Data: Network Considerations 39
7.2.9 Failure Considerations 40

8. Content Service Providers (CSPs) 41

9. Application Services 42
9.1 High Availability Virtual Local Area Network (VLAN) 42

10. Carrier Meet-Me Room Services 43
10.1 Engineering Consideration 43
10.2 MMR Layout 43
10.2.1 Power Specifications 44
10.2.2 Technical Specification 44

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

Appendix A. ICE Global Network Connectivity Options Summary 45

Appendix B. Technical Terms and Acronyms: 46

Appendix C. Quick Connect Sheet – High Availability 49

Appendix D. Sample – Layer3 Switch Configuration 51

Appendix E. Sample – Layer3 Designated Market Maker Connectivity 54

Appendix F. Data Center Cabling & Installation Guidelines 56

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

3. US Liquidity Center (USLC) – Mahwah

Since 2010, two data centers house the NYSE markets serving the global equities and derivatives trading communities. The U.S. Liquidity Center site is located in Mahwah, New Jersey and the European site is in Basildon, England.

The USLC is a state of the art, Tier 4 guided data center located in Mahwah, New Jersey. Special consideration was taken during its construction to ensure that the building and supporting infrastructure such as electrical, cooling, and communications entry points are diversified and fault tolerant to meet or exceed 99.995% data availability for the systems within. USLC's colocated customers have the opportunity to take advantage of resilient infrastructure that provides direct access to NYSE trading services such as market data and content service provider data, as well as the ability to gain access to ICE and other markets, all from a single facility.

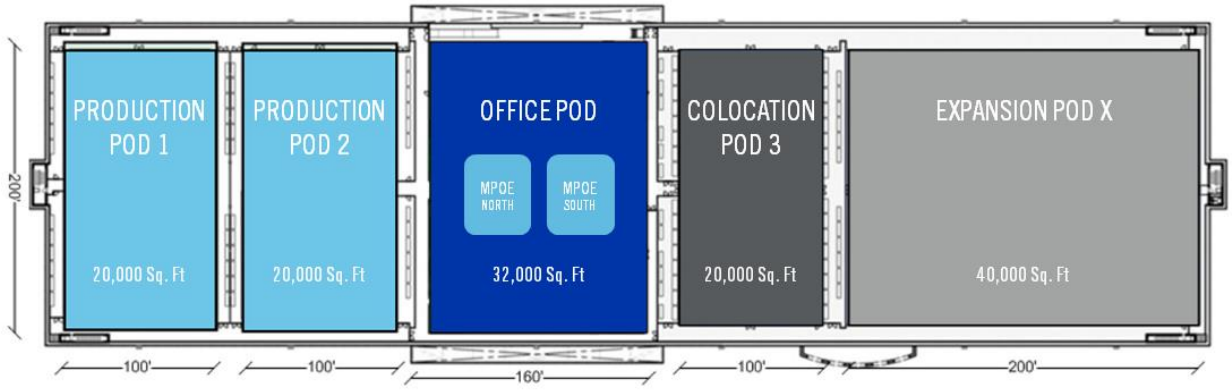

(Figure 1) – USLC Layout

USLC Location: 1700 McArthur Boulevard, Mahwah, NJ, 07430

3.1 Engineering Specifications

- 398 000 sq. ft. building situated on a 28 acre site 34 miles from Wall Street, New York
- Tier 4 guided design of all critical infrastructure (2N or N+2)
- Data center white space scalable to 100,000 square ft. at 150 watts per square ft.
- 20,000 sq. ft. colocation pod
- Redundant fiber diversely routed to site
- 28 MW of total site electrical power
- 48 hours of emergency generator fuel storage and cooling tower water (at full load)
- Double action pre-action sprinkler fire suppression
- Armed security staff and state of the art surveillance systems
- Monitoring and Evaluation (M&E) on ground floor and data halls on mezzanine floor

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

4. Colocation Services

4.1 Kilowatts & Cabinets

Colocation cabinets come in standard sizes of 4kW, 8kW and 12kW with variable power configurations available up to 20kW. A standard 4kW cabinet can scale up to 5kW of power, and a standard 8kW cabinet can scale up to 11kW of power. Customers requiring 12kW or more may purchase an upgrade kit, making the cabinet scalable to 20kW. Partial cabinets are also available in 1-2kW power configurations for customers with lower space/power requirements.

Non-standard cabinets and cages can be accommodated subject to advance notice with engineering and design review and approvals.

4.1.1 Power Specification

Cabinets configured as 4kW, 8kW, and up to 20kW of power use branch circuits from Remote Power Panels (RPP). One RPP provides 'A' feed power while the other provides 'B' feed power. In the event of a failure to either the 'A' or 'B' feed, the other feed is engineered to provide full power to the cabinet.

4kW Cabinets

Each cabinet has two branch circuits, one from each of the RPPs. Each branch circuit is a single phase, 208VAC 30Amp feed which can support a maximum of 5kW of power. Both branch circuits are monitored to ensure each carry half of the 4kW load with an alarm in place for notifying the Data Center Operations personnel should both branch circuits' total power exceed 4kW.

8kW Cabinets

Each cabinet has four branch circuits, two from each of the RPPs. Each branch circuit is a single phase, 208VAC 30Amp feed which can support a maximum of 11kW of power. The four branch circuits are monitored to ensure each carry half of the 8kW load with an alarm in place for notifying the Data Center Operations personnel should the total power exceed 8kW.

12kW-20kW Cabinets

Each cabinet has four branch circuits, two from each of the RPPs. Each branch circuit is a three phase, 208VAC 40Amp feed which can support a maximum of 20kW. The four branch circuits are monitored to ensure each carry half of the 20kW load with an alarm in place for notifying Data Center Operations should the total power exceed 20kW.

4.1.2 Technical Specification

Power Strip

Two vertical power strips are provisioned in each cabinet. Strips will be on either sides of the cabinet. Each strip is fused with the following standard configuration:

- **4kW & 8kW Cabinets Outlet Size (single phase – single strip):**
  - 30Amp (18x IEC C13, 6x IEC C19) 208 VAC receptacles
  - 30Amp (8x NEMA 5-20R) 120 VAC receptacles
  - Optional: 30Amp (24x IEC C13, 6x IEC C19) 208 VAC receptacles
- **12kW-20kW Cabinets Outlet Size (three phase – single strip):**
  - 40Amp (30x IEC C13, 6x IEC C19) 208 VAC receptacles
  - Optional Strip for 5-20R outlets

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

- **Vertical Mount**
- **Local Meter**

Additional power strip outlet configurations are available upon request.

Standard[1] Cabinet

- Manufacturer: Rittal Corporation
- Part: 9963619, Modified Custom TS8
- Color: Black
- Size: 45 Rack Unit (RU)
- Dimensions (Depth × Height × Width): 47.42 in. × 84.64 in. × 31.38 in.

Server Enclosure Specification

- 2 Server Enclosure Specification
- Hinge and lock points are internal and not accessible from outside cabinet with doors closed. Mounting of server fans can be installed without need for cutouts
- 3 Server Enclosure Specification
- Enclosure widths equal to or greater than 28 in. (700mm) allow for 19 in., 21 in., and 23 in, rack mounting of components and/or allow for the offsetting of 19 in. rails, left or right, to allow for additional cable management and air plenum space.

Material Specifications

Roll formed carbon steel and closed frame members provide a welded, vertical and horizontal structure of symmetrical profile. All metal components are primed, baked, powder coated, and baked again to assure maximum appearance and corrosion resistance. RAL 7035 and Sand Texture Black are available as standard colors. Optional color choices are available upon request.

- Sidewalls: 16 gauge cold rolled carbon steel
- Front and Rear Door: 14 gauge cold rolled steel
- Frame: 16 gauge cold rolled carbon steel with unlimited mounting options provided by installation holes spaced at 0.98 in. (25mm) intervals

Method of Construction

Frame

- Enclosure frame are a 16 fold design, with 0.98 in. (25mm) repetitive hole pattern (round and slotted holes) to allow installation of various components.
- Rack mounted equipment are installed on four independent vertical mounting rails.
- All metal surfaces are free of burrs, and welded joints are ground free of weld splatter.
- The frame is fully welded and provides minimum 3000lb static load capacity.
- The frame meets Seismic Zone 3, standard, and can be upgraded to Seismic Zone 4.

Doors

- Sheet cold rolled steel, 14 gauge, with horizontal and vertical door stiffeners to provide additional rigidity and mounting surfaces.
- Front door is provided with a foamed in place perimeter gasket.
- Fully perorated front and split rear doors with 64% air flow.

---

[1] Note that both 28 in. and 24 in. wide cabinets are available upon request and at the discretion of NYSET.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

- Reversible hinges, rated for 66 lbs. per hinge, are design with a minimum of three quick release hinges and captive hinge pins.
- Minimum of two point latching/locking for security

Roof Panels

- Fully perforated with four 4 in. diameter cable entry points
- Grommets are provided to seal unused cable entry holes.
- Gasket
- Mating surfaces are sealed with closed cell foam-in-place (FIP) polyurethane gasket
- Bonding
- All components of the cabinet must have a grounding stud to have common ground potential with the use of grounding straps.
- Hardware to be provided to for enclosure connection to facility grounding components.
- Component Mounting Rails (19 in.)
- Front and rear mounting rails are depth adjustable multi-fold "Z" shaped, compliant with EIA-310-D standards
- Vertical mounting rails are constructed of 2.5 mm/12 gauge steel with equipment mounting holes using 9.5 mm^2.
- Total static load capacity (regardless of location in the cabinet) of 2000 lbs. ; equivalent to 47.6 lbs. per RU. Weight is measured using equal weight loading on all four rails.
- Mounting rail depth can be adjusted as desired as along as the maximum useable depth is no less than 2 in. of the overall enclosure depth (i.e. 38 in. in 40 in. deep frame)
- Designed with floating attachment points in top and bottom of frame only; preventing the interference of interstitial cable management space from the vertical rails to the sidewalls.
- Individual RU space is identified by a line at the top and the bottom of each RU and sequentially numbered. RUs have three holes, with the middle hole used as placement for designated space number, and measure 1.75 in. (44.45 mm) high. RU space marking is ink jet applied, not adhesive backed. The rear side of all mounting rails mirror the same RU space markings.

Additional sets of mounting holes, which replicate the hole pattern of the frame, are available for the installation of various accessories such as vertical or horizontal cable management, and power strips.

Enclosure widths equal to or greater than 29 in. (700 mm) shall allow for 19 in., 21 in., and 23 in. rack mounting of components and/or allow for the offsetting of 19 in. rails, left or right, to allow for additional cable management and air plenum space.

Baying

- Baying of cabinets is to be accomplished
- without disturbing any cables or rack mounted equipment
- with the use simple tools.
- after access into the cabinet, as not to compromise cabinet level security.
- Baying of the cabinets is not allowed for the purpose of increasing the width of the row.

4.2 Partial Cabinet Solutions

Partial cabinets solutions provide a packaged solution for colocation customers who only require limited space and power but wish to take advantage of low latency access to the NYSE markets.

A standard bundle is offered which includes the following base items:

- 8Us of rack space

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

- 1 x IP SLC connection (dedicated)
- 1 x LCN LX connection (dedicated)
- 2 x LCX cross connects
- Time service

Selected items above are also customizable to a limited extent via choices of:

- 1G or 10G SLC & LCN connectivity
- 1kW or 2kW of total power
- NTP or PTP timing services protocol

4.3 Power Not Used (PNU)

Power Not Used (PNU) offers the Colocation customer an option to pay a reduced rate for the option to reserve cabinets and kilowatts that the customer anticipates will be required in the future.

4.4 Hosting Services

The Hosting Services allow approved third party service providers, (Hosting Users), authorization to occupy space in the USLC for the purpose of providing infrastructure hosting, service bureau services, risk management, order routing and Market Data delivery services directly to USLC customers.

Hosted Users are able to offer hosting services to Customers and can be categorized as any of the following exchange participants:

- Member
- Non-Member
- Sponsored Participant (SP)

4.5 Timing Service

Customers within the Colocation hall have the following options for receiving time and synchronization services based on their precision requirements.

- Network Timing Protocol (NTP) services across the LCN
- Direct Precision Timing Protocol (PTP) service over Ethernet
- Direct GPS feed

4.5.1 Network Timing Protocol (NTP) Service

Customers can receive NTP services from a Stratum 1 time source via their LCN connections. NTP peering IP addresses will be provided during the provision process. For more information on LCN connection specifications, refer to *Liquidity Center Network Service* section later in this document.

4.5.2 Precision Time Protocol (PTP) Service

Colocation customers looking for precise synchronization accuracy will be provisioned with PTP IEEE1588 compliant feed. PTP services can be received by directly connecting to USLC PTP environment via direct Ethernet 1G MMF fiber cross-connection, which will give them the ability to achieve sub 1µs precision using a NIC with an IEEE1588-compliant hardware clock.

PTP Distribution

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

The USLC PTP service will receive the local clock reference from GPS receivers, which will be distributed to the Colocation customers in accordance with the IEEE1588 draft. USLC supports IEEE1588 unicast, multicast-only, and hybrid PTP profiles.

Each of the USLC Colocation halls are furnished with PTP edge routers, providing the direct point of connectivity between PTP Distribution Network and the directly connected customers. Each of the directly connected customers should have two physical connections to the facility for redundancy. Customers connecting to ICE's PTP environment should support BGP4 protocol for exchange of source routes and PIM SM in case of implementing multicast-only and hybrid PTP profiles.

RFC1918 private ranges will be assigned to the customers; alternatively, customers may use their globally registered IP addresses. BGP Autonomous System (AS) addresses will be assigned from the private space identified by American Registry for Internet Number (ARIN).

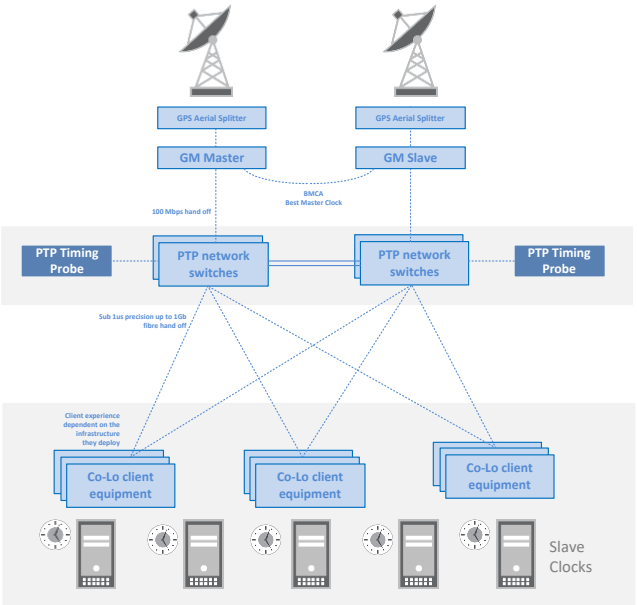

(Figure 2) – PTP Distribution Network

4.5.3 GPS

Customers may receive time services via a direct feed from Global Positioning System (GPS) antennas. GPS time is the atomic time scale implemented by the atomic clocks in the GPS ground control stations and the GPS satellites themselves. GPS time was zero at 0h 6-Jan-1980 and since it is not perturbed by leap seconds GPS is now ahead of UTC by 15 seconds.

The USLC is equipped with three separate antennas and GPS receivers. *Customers are recommended to subscribe to all three feeds in order to form a quorum and spot an errant source.*

Customers will be provided with precise time offset information as well as the estimated delay associated with the cable length between the GPS antenna and their cabinet as part of the GPS services installation and calibration process.

GPS Distribution

Customers will receive GPS via an ICE -provided cable type LMR400 and the connector types is BNC, TNC, or N; alternatively, different patch cables can be provided upon request.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

4.5.4 Time Service Comparison Table

Media options:	Accuracy	Delivery Method
NTP	A few milliseconds	Delivered over LCN network
PTP	Sub microsecond to sub 10 microseconds	Delivered over a dedicated PTP network
GPS	Sub microsecond	Direct connection within USLC

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

5. High Availability

5.1 Overview

Supporting the NYSE exchanges in providing high availability and quality to the production systems operated is the High Availability network. High Availabiluty is a secure, resilient and redundant multi-exchange, multi-asset class and multi-participant global network. By connecting to High Availability, a Customer has the potential to connect to to a broad range of services, including markets, alternative trading systems, clearing and settlement services, market data vendors, content service providers, and other core securities industry participants.

The High Availability network backbone is comprised of two diverse, logical networks that connect 10 US and 14 European Access Centers to all ICE & NYSE markets and Data Centers. This provides customers in the financial services industry with distinct geographical locations to which they can meet the High Availability edge routers.

In addition, the release in 2016 of ICE Global Network low latency products (IGN Wireless and IGN Low Latency Network) augments the ICE Global Network product portfolio by adding options focused on speed over redundancy.

5.2 High Availability Highlights

- High Availability is a front-end network interface for approved customers to connect to ICE & NYSE markets as well as third party content. ICE Global Network supports industry-standard network protocols for the transport of financial market applications and data. It provides a reliable and redundant transport mechanisms for data traffic and acts solely as a transport network, exclusively supporting the IP protocol suite for connecting to each of the markets.
- High Availability allows customers to consolidate disparate WAN connections into consolidated connections and to maintain high-availability network access to market systems.
- Customers connect to High Availability by connecting directly via Ethernet at one or more of the High Availability Access Centers, or by connecting via a third party (extranet) provider. Customers who access High Availability through a third party service or extranet provider must confirm interface specifications with their specific provider.
- High Availability provides a carrier-grade infrastructure supporting industry-standard protocols widely accepted and utilized in Internet connectivity, while maintaining the security, operational integrity, and high standards of availability of ICE & NYSE trading.

High Availability provides some security functions at the network layer but in addition, each market accessed, and the systems and services that it supports will have their own set of security requirements that may include/require end systems to perform authentication and access control.

This document only outlines information regarding the network interface to which customers will connect and not the detail of the application services offered over High Availability. Customers must work with High Availability & Colocation Sales or Provisioning teams to learn more about all the service specific details.

5.3 Connectivity Options

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

High Availability supports the following connectivity methods:

- **High Availability IP Direct Connect (SDC):** Direct access from customers. Customers order their own Ethernet local loop and configure the equipment directly connected to High Availability.
- **Application Service Providers (ASP):** provides a form of value added software service to customers and aggregates them to the ICE Global Network backbone for access to ICE & NYSE applications.
- **Extranet Service Providers (ESP):** aggregates customers with Layer 3 routing to the ICE Global Network backbone for access to ICE & NYSE applications.

High Availability is designed to meet the unique needs of members of the financial services industry with varouis product offerings covering redundancy, high capacity, and ultra-low latency access to markets. For cost-effectiveness, scalability, and operational efficiency, the traffic of multiple customers will be aggregated onto the high availability fiber-optic backbone and delivered to relevant Data Centers. For customers requiring optimum latency over redundancy, low latency connectivity methods, used in conjunction with High Availability SDC will provide a complete solution.

Customers are able to run multiple business services over a single physical connection to High Availability. Direct connectivity into the High Availability network is currently available from US (New York, New Jersey, and Chicago) and Europe (Paris, London, Amsterdam, Lisbon, Brussels, and Frankfurt). This architecture allows customers to implement redundant paths to at least two Access Centers, one on each logical network from their own sites. Figure 1 shows two logical networks providing diverse access for customers connecting to Availability Access Centers.

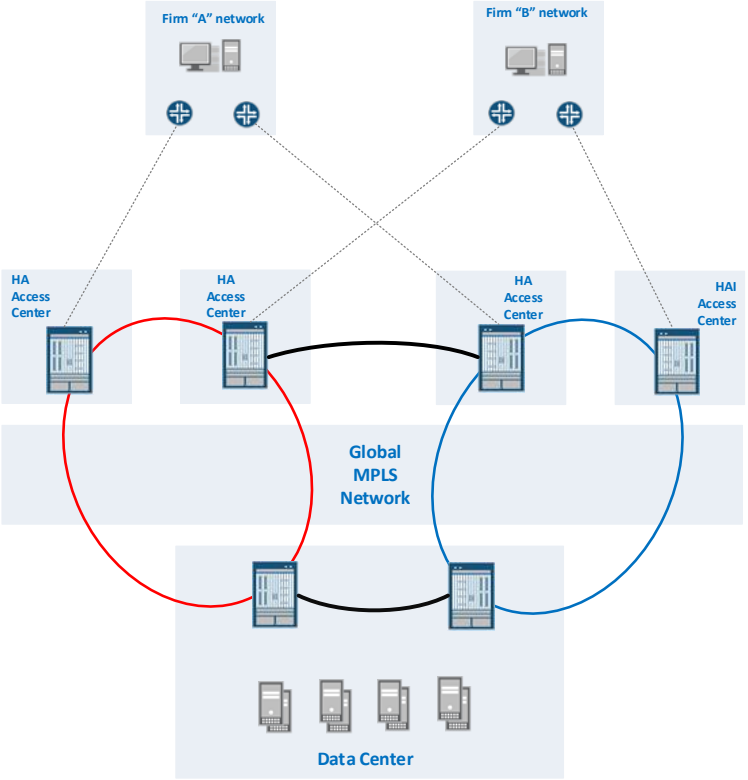

(Figure 3) – High Availability Logical Overview

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

5.4 High Availability Concepts

To meet the unique requirements of its domestic and international customers and vendors, High Availability provides a high capacity, high-availability, secure, and easy to use IP-based conduit into and out of the individual datacenters and markets. By using the industry-standard TCP/IP suite of protocols, High Availability enables customers to implement interactive and computer-to-computer connections to the services offered with less preparation and development time, and with a greater assurance of compatibility and interoperability. To the greatest extent practicable, High Availabiluty seeks to empower existing and new customers to:

- Gain access to market services quickly and easily
- Have a range of choices for access and performance, vendor, technology, and cost
- Access multiple services over a single physical connection to High Availability
- Add additional connenctions designed specifically for low latency
- Utilize widely available and accepted industry-standard applications, protocols, and structured data formats, to reduce complexity, leverage the customers' resources, and minimize the need for development or customization while still addressing their particular service requirements;
- Minimize the amount of systems development required, and adopt generic solutions consistent with the above;
- Increase customers' control over their interface to services
- Simplified process for requesting service changes.

5.5 High Availability US Access Centres

High Availability Access Centers are the entrance points for customers to connect to HA. These Access Centers are securely fenced-in cages that are hosted in large telecommunications facilities. Each cage contains HA backbone equipment and customer access equipment. See below for a list of HA US Access Centers.

High Availability Access Centers				
Address	**Ring**	**City**	**State**	**Zip**
32 Avenue of the Americas	Blue	New York	NY	10013
111 8th Ave	Blue	New York	NY	10011
111 N Canal St	Red	Chicago	IL	60661
165 Halsey St	Red	Newark	NJ	07102
300 Boulevard E	Blue/Red	Weehawken	NJ	07086
350 E Cermak Rd	Blue/Red	Chicago	IL	60616
360 Hamilton Ave	Red	White Plains	NY	10601
800 Secaucus Road	Red	Secaucus	NJ	07094
1400 Federal Blvd	Red	Carteret	NJ	07008
1700 MacArthur Blvd	Blue/Red	Mahwah	NJ	07430

5.6 Protocols Supported

High Availability acts as a transport mechanism for multiple IP-based markets, and as such, is agnostic to the transport layer protocol employed; however, High Availability will be configured to only allow transmission of IP-based transport protocols required by its own market systems and those of business partners. By adopting the use of the industry-standard IP protocols, the intention is to reduce complexity, leverage customers' resources, and reduce the need for development or customization. ICE Global Network will continue to support future industry standards as they change.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

5.7 Physical connectivity options

From a physical connectivity perspective, the following connection standards are supported by High Availability:

Media options:	Ethernet Standards
Single-Mode fiber in HA Access Centres	1000BASE-LX
	10GBASE-LR
	40GBASE-LR4
	100GBASE-LR4
Multi-Mode fiber in USLC – Data Centers	1000BASE-SX
	10GBASE-SR
	40GBASE-SR4

5.8 Security Goals

The security architecture and security mechanisms of High Availability ensure the operational integrity of ICE operated systems and networks against threats arising via external internetworking connections. High Availability does not specifically protect customers' networks, but does enforce traffic filtering and routing policies on the High Availability network at those points where it connects to customers.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

6. Network Connectivity Services: Detailed Specifications

6.1 Overview

ICE Global Network provides multiple connectivity options to support customers' individual requirements. Within the USLC, customers can connect to either LCN or High Availability SLC: LCN is the local network within the Mahwah USLC, for Mahwah hosted markets and services, and High Availability SLC provides access to NYSE Group test/certification and DR applications, as well asthe full portfolio of ICE Futures applications and third party services.

Outside of the USLC, for WAN connectivity, customers can select from IP (SDC & LSP), IGN LLN, IGN Optic and IGN Wireless. High Availability SDC & LSP products provide the ability to access all content available on the ICE Global Network via a single, consolidated connection. IGN Optic & IGN Optic Connect provide connectivity from the customer colocation hall to resources outside the Data Center and the addition of Wireless and Low Latency Network services in 2016 will allow fo low latency connectivity between Mahwah and select Access Centers.

This section outlines the detailed physical and logical interface requirements for each of the different products along with routing considerations.

6.2 Liquidity Center Network (LCN) Services

The Liquidity Center Network (LCN) is only available to customers collocated within the US Liquidity center in Mahwah The LCN allows for the fastest and most direct path to the NYSE Group trading systems and provides the lowest latency profile for delivery of proprietary NYSE Group market data. In addition to speed, the low latency LCN network offers the benefit of a highly redundant local network and facilitates connectivity to National Markets Systems (NMS) data (CTS/CQS/OPRA).

LCN is available in four bandwidth options:

- 1G low latency network
- 10G low latency network
- 10G LX ultra-low latency network
- 40G ultra low latency network

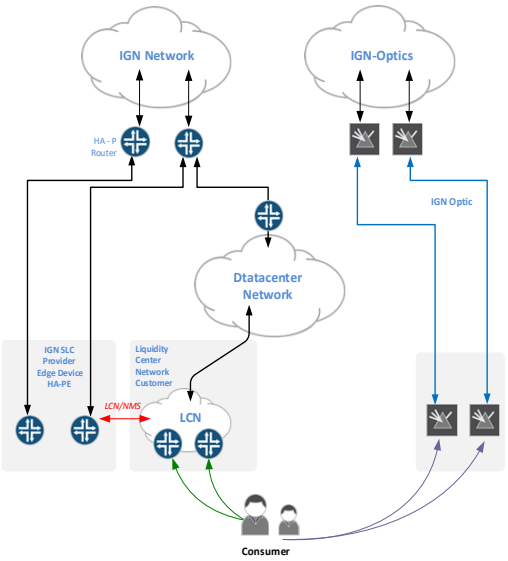

(Figure 4) – NYSE / Liquidity Center Networks

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

The LCN 10G LX and 40G products offer a lower latency path compared to the standard 1G/10G LCN products.

IMPORTANT: The following restrictions and cautions apply to customer usage of the LCN network:

Customers with both LCN and SLC connections:

- Can only consume Data Center services over a single path
- May not receive the same routes over both the SLC and LCN
- May not use the SLC as a fail-over or redundant path for LCN
- Are not recommended to use the LCN as a fail-over or redundant path for SLC

For services which NYSE does make available over both the LCN and SLC networks, the customer may consume both; under the following conditions:

- Customer deploys physically separate routers
- Customer deploys a single physical router with logical separation of IP routing tables using Network Virtualization such as MPLS/L3VPN or VRF Lite
- Both services are consumed by the Customer with pre-defined route weighting and metrics to ensure a clear primary and secondary path

Customers with a combination of 1G/10G and 10G LX/40G LCN connections:

Common policies (single or multiple routers):

- LCN will entitle both A & B feeds on both 1G/10G and 10G LX/40G connections for PIM customers - customer will be responsible to subscribe to the proper feed(s) that fits their port speed
- Must announce unique IP prefixes into each environment (except during migration)
- Must use BGP "AS Path" manipulation to influence route selection over preferred path for unicast
- Must use route policy to influence NYSE IP prefixes over preferred path for unicast services
  Must use route policy to influence NYSE IP multicast source prefixes (RPF) over preferred path

Single router:

- May consume all multicast services over either connection, only if entitlements are identical on both connections
- May only use a single path to access NYSE services - either via 1G/10G or 10G LX/40G LCN and for unicast services only

Multiple routers:

- May consume all multicast and/or unicast services over both connections according to their provisioned entitlements

Customers with multiple (active) 10G LX/40G LCN connections:

- Will have their connections terminated on separate network leaf switches
- Must provide unique IP prefixes over each connection for unicast services only
- Must use route policy to influence NYSE IP prefixes over preferred path for unicast services only
- Must use route policy to influence NYSE IP multicast source prefixes over preferred path

6.2.1 National Market Systems (NMS) over LCN

Colocation customers can also subscribe to NMS services (CTS/CQS/OPRA) over their existing LCN connections. Receiving NMS data over the 1G/10G LX/40G LCN connection will have a slightly higher latency profile than that of SLC by approximately

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

13µs one way and approximately 3µs one way over the 10G LX/40G LCN. Also special considerations must be made when receiving services which are available over both LCN and SLC (Restriction 5.1-D).

6.2.2 LCN Latency Information

Both 1G/10G LCN and the 10G LX/40G LCN options use a common backend Data Center infrastructure. The differentiator is in the way they access this infrastructure. The 10G LX/40G LCN option uses a set of high-speed low latency leaf spine switches; while the 1G/10G LCN option use a chassis based switch. As a result, the 10G LX/40G option has an overall saving of 12µs when compared to the 1G/10G LCN options.

6.2.3 LCN Physical Connectivity

LCN 1G/10G/10G LX physical connections will be terminated on a patch panel in the customer's Colocation cabinet with an LC through connector. LCN 40G physical connections will be through an MTP terminated 12 core OM3 Multimode fiber trunk cable presented in the customer's Colocation cabinet. Each trunk cable should be connected to a 10G/40GBASE-SR4 (QSFP) transceiver.

Standard Fiber Connection Requirements		
Speed	**1G/10G/10G LC**	**40G**
Connector	LC Connector	MTP Connector - 12 Core OM3
Fibre	Multimode	Multimode Fiber
Wavelenth	850 nm	4 x 850 nm - 40GBASE-SR4 QSFP Transceiver

Additional LCN Connectivity Options

Customers deploying network switches which support 40 Gigabit Ethernet (*IEEE P802.3ba*) by combining four sequential SFP+ interfaces into a logical 40 Gigabit Ethernet port, will need to use a breakout or fan/out harness. The resulting interface must be fully compliant with the IEEE 40 Gigabit Ethernet standard. The fan/out harness is a cable adaptor one end having a pinned MTP connector and the opposite end breaks out to four MM-50M LC connectors.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

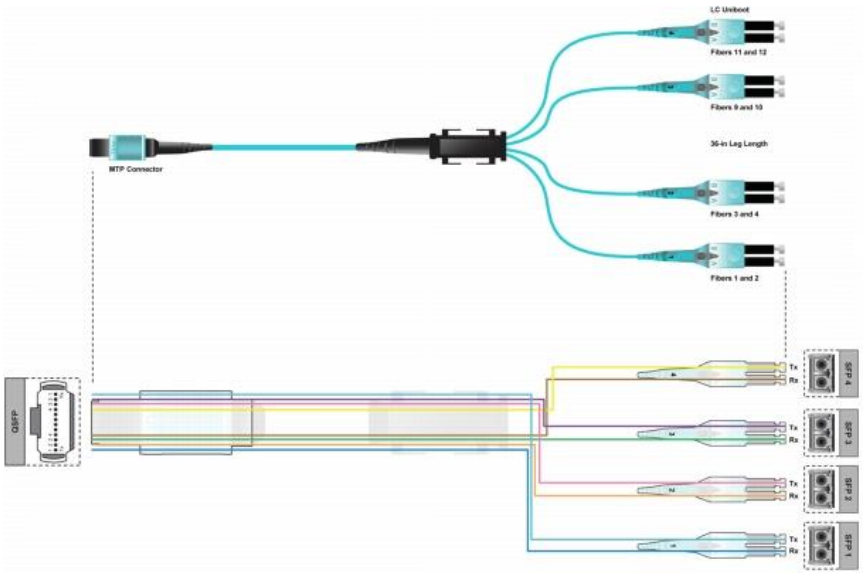

Figure 5 - Example - Fan Out Cable

Along with the fan/out harness, an MTP coupler will be needed. The MTP coupler is the means by which the trunk cable and the fan/out harness are connected together. Please see figure below.

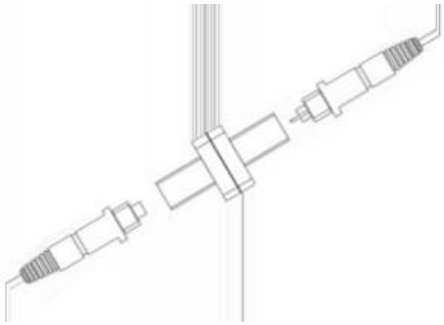

Figure 6 - MTP M/M Coupler

Optional Fiber Connection (Agile Port - Fanout)		
Type	**Fan-Out LC**	**40G - MTP**
Connector	4 x LC Connector	MTP Connector - 12 Core OM3
Fibre	Multimode Fiber	Multimode Fiber
wavelenth	850 nm	850 nm - 10G/40GBASE-SR4 QSFP Transceiver

6.2.4 LCN Address Space

Customers' IP Address Space

Each customer's IP addressable entity (logical or physical), which accesses market services, requires its own IP address. Given this IP address, LCN is able to route outbound to the customer's device via the access method contracted by that customer (i.e. the address must be reachable). Every IP address that can be assigned to a device must be either a globally unique, registered IP address or a private IP address from a range of RFC1918 IPs assigned by ICE.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

If a customer's device uses a private address from a range not assigned by IGN, the customer might choose to implement Network Address Translation (NAT) to present a globally registered IP address. However, NAT may limit the customer's ability to take advantage of redundant connections seamlessly and could interfere with the functionality of the applications that rely on knowing the true IP address of the end device. Customers must work with ICE Customer Engineering during their provisioning process to resolve any related issues.

LCN implements anti-spoofing packet filtering on edge router ports, which will discard inbound IP datagrams with unexpected source addresses. Customers may wish to implement packet filtering in their router(s) or firewall to limit access to LCN from within their enterprise.

Network Address Translation / Proxy

The LCN network does not use NAT or proxy services. Each customer connection is filtered to receive the authorized set of routes and services.

6.2.5 LCN Networking Configuration

Customers' CPE and LCN switches will exchange IP routes using BGP. The BGP addresses for peering are available from the ICE Global Network Customer Engineering Team as part of the customer install package.

BGP Hold Times

Customers should set their BGP settings to peer with LCN as follows:

hold time value: 20 seconds
keep alive interval: 6 seconds

BGP Autonomous System Information

The Autonomous System numbers for USLC is as follows:

US – USLC ASN: #64552

BGP Community Strings

The following information is provided to the customer for the purposes of traffic engineering within their own network(s). In the community name, "dh" stands for "data hall", "sw" stands for "switch". LCN overrides any community values advertised by customer's network(s).

community dh1-sw1 = 64552:0	**community dh2-sw1 = 64552:2**
community dh1-sw2 = 64552:1	**community dh2-sw2 = 64552:3**

BGP Unicast Routes Advertised

LCN will advertise IPv4 routes for all public unicast services in the Data Center. Colocation customers should accept those routes that are required for the products they purchase. Route information per-product will be provided during the provisioning process.

VLANs

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

Customer interfaces to the LCN network will NOT be configured for 802.1Q VLANs, and VLAN tagging set by the customer may be ignored or tagged packets discarded. All traffic between the customer and the LCN will share a single, non-tagged interface.

6.2.6 LCN Multicast

The primary method of multicast distribution within the Data Centers is via PIM-SM (Protocol Independent Multicast-Sparse Mode). Using this protocol, customers will be able to subscribe to the multicast feeds of their choice and have the option of taking multiple connections that can be used for resiliency with dynamic recovery or separation of redundant multicast feeds, over the LCN network. Colocation customers should consider deploying network equipment which supports both PIM-SM and BGP.

For customers who do not require dynamic recovery between their LCN links, multicast services can be statically provisioned over the LCN connections in a configuration that the customer requests, with the restriction that dynamic (PIM-SM) and static (IGMP) multicast configurations cannot be mixed on the same interface.

It is recommended that customers interested in receiving multicast services also consider ensuring that their network devices and servers have support for IGMPv3 protocol, to support Source Specific Multicast (SSM); which is on the future roadmap for ICE Global Nework multicast services.

For many products, ICE Global Network distributes multicast in a dual-stream configuration, providing a duplicated 'A' stream and 'B' stream for redundancy. For more information, please consult the product specification for NYSE multicast data of interest. This can be found at https://www.nyse.com/market-data/real-time.

Multicast Source Routes

Routes for all public multicast sources in the Data Center including those for NMS *(CTS/CQS/OPRA)* will be sent to LCN multicast customers via BGP. Customers are responsible for configuring their equipment appropriately if they wish to balance or separate 'A' and 'B' multicast traffic when multiple LCN links are used.

PIM-SM Rendezvous Points

Colocation customers using PIM-SM to dynamically receive multicast products from LCN should configure their CPE to point to the LCN PIM Rendezvous-Point (RP) for purchased multicast products. LCN provides RP redundancy using Anycast, and customers must statically configure the RP Anycast address in their equipment. LCN does not support Auto-RP, BSR, or other dynamic RP discovery protocols.

The IP address of the Data Center RP for NYSE Core multicast services, along with the associated multicast group(s) and source(s) information, will be provided to the customer during the provisioning process.

For customers who choose to receive NMS (CTS/CQS/OPRA) services over their LCN connections, the multicast RP, group(s) and source(s) information will be provided during the provisioning process; the RP information used for NMS services will be independent of that used to provide NYSE Core multicast services in the Mahwah Data Center. The route to the Data Center and NMS (CTS/CQS/OPRA) RPs' will be announced to the customers via BGP.

6.2.7 LCN Rate Limiting

LCN 1G/10G

Colocation customers' LCN 1G/10G interfaces will be configured with ingress (from the customer into LCN) rate limits on a per-product basis. Rate limits are added, but not shared. For example, if a customer purchases two products, each with a

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

50M rate limit, the customer may send 50M for each product simultaneously, for a total of 100M. The customer may not, however, send more than 50M of traffic for either product.

LCN 10G LX/40G

Colocation customers' LCN 10G LX/40G interfaces will be configured with fixed ingress aggregate rate limiter. All ingress (control and data) traffic on each customer 10G LX port will be limited to 1.3G and each customer 40G port will be limited to 5.2G without any regard to its origin, destination, protocol or priority. Any ingress traffic surpassing the bandwidth thresholds will be unconditionally discarded. More granular controls will be implemented in the future as the service is developed.

6.3 High Availability Services

The use of logical interfaces and virtual LANs (VLANs) is fundamental to the method by which High Availabiltity delivers access to multiple content sources simultaneously through a single network interface. For all NYSE markets, for example, an individual VLAN is used to support all the unicast IP services associated with test and production. This is separate to the NYSE miulticast VLAN and additional VLANS exist for both ICE Markets access as well as other third party content. This concept allows High Availability to maintain a logical separation between key services and significantly improves HA's ability to provision new services, scale the environment, and at the same time, allows the customers to maintain that logical separation should they wish to do so.

At the network layer, High Availability requires the logical interfaces to be defined separately on a customer's Ethernet interface in order to receive the services available from each of the individual services. These logical interfaces must be capable of supporting the 802.1Q protocol, which allows for processing IP packets tagged with the 802.1Q information and interpreting the logical separation associated with the individual virtual LANs, or VLANs. Using this architecture, HA delivers each set of unicast services on a separate VLAN to the customer's edge router. Customers are not required to transport the traffic via VLANs within their own networking environments.

High Availability services are available both inside the USLC and on the WAN, with different options for connectivity based on a customer's key drivers; be that remote location accessible, speed, or resiliency required.

This section outlines key interface information for the various High Availability services:

6.3.1 IP Liquidity Center (SLC) Services

IP Liquidity Center (SLC) services offer access to a global MPLS network that connects customers to ICE & NYSE Markets and Services as well as third party financial industry content service providers. All SLC services are available to Colocation customers in the USLC (Mahwah) Liquidity Center.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

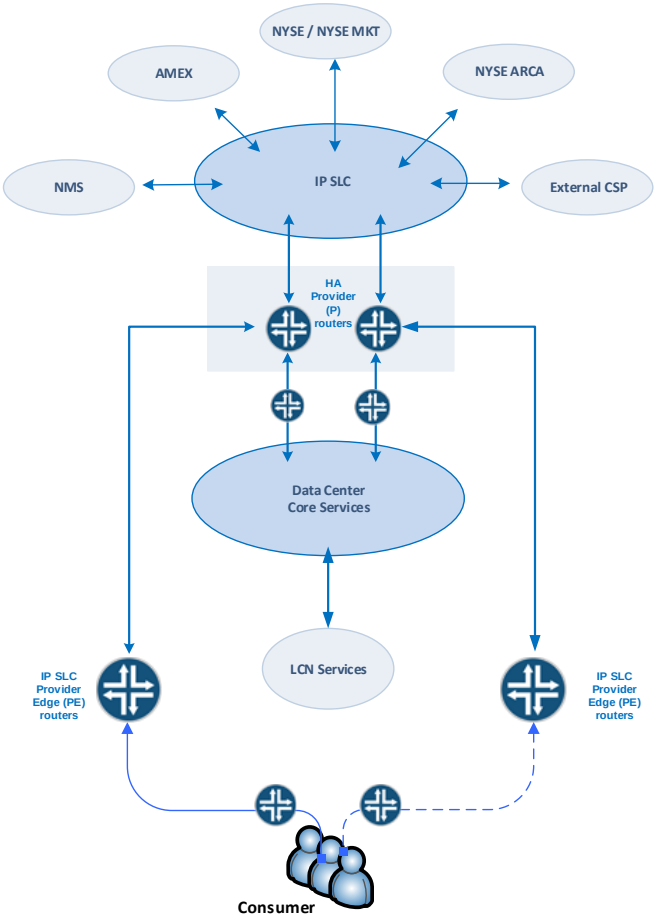

NYSE Liquidity Center

(Figure 7) – SLC

6.3.2 IP SLC Physical Connectivity (Mahwah)

Physical connections for SLC customers require that customers connect their equipment within the ICE USLC via 1G, 10G or 40G Ethernet connections. Customers' connections to SLC must be configured for 802.1q trunking to support VLAN tagging.

Standard Fiber Connection Requirements			
Speed	**1G**	**10G**	**40G**
Connector	LC Connector	LC Connector	MTP Connector - 12 Core OM3
Fibre	Multimode	Multimode	Multimode
Wavelenth	850 nm	850 nm	4 x 850 nm - 40GASE-SR4 QSFP Transceiver

6.3.3 High Availability Direct Connect (SDC) Ethernet (WAN)

High Availability Direct Connection (SDC) enables firms to use their own Ethernet connectivity to connect with ICE Global Network at geographically diverse and vendor-neutral Access Centers outside of or inside Mahwah.

The High Availability 40G SDC Bundle and the High Availability Limited Service Port are sub-options of the SDC service:

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

6.3.3.1 High Availability 40G SDC Bundle

HA SDC 40G Bundle offers customers a packaged solution of resilient connectivity in selected Access Centers. Customers colocated in either Secaucus or Carteret sites can effectively access both sides of the HA network, providing redundancy, from a single location. Access to redundant HA connectivity from a single location removes the need for firms to order and manage a separate provider for a redundant circuit to a second access center.

The 40G SDC Bundle consists of:

- Two 40G ports - one in 111 8th and the second in either 800 Secaucus or 1400 Federal Blvd; and
- HA provided circuit between 111 8th and the colocation location.

Customers will be given 2 x 40G Ethernet handoffs in their colocation location, consistent with the HA SDC specifications below.

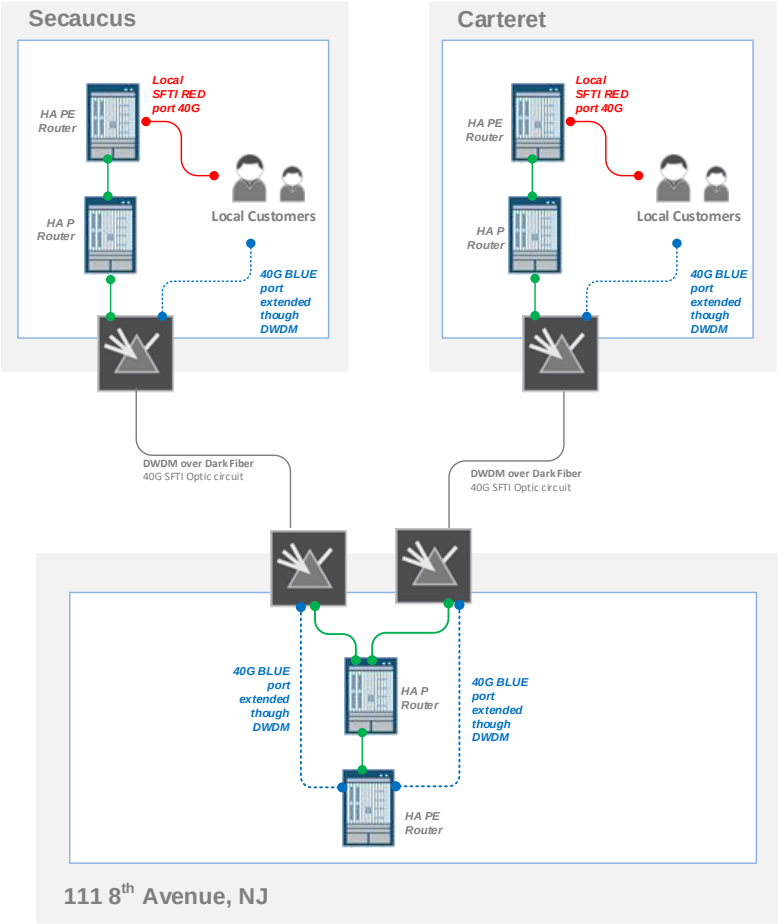

Figure 8 – 40G Bundle

6.3.3.2 Limited Service Port (LSP)

LSP enables firms to use their Ethernet connectivity to connect with a limited service High Availability port. It provides customers with a way to access a single NYSE non-core, ICE or third party service via a directly connected 1G HA port. This port comes with a choice of one of the following non-core services: CSP or VCC. To add further entitlements onto an LSP, customers will be required to upgrade to a full IP SLC or HA SDC port..

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

6.3.4 High Availability Physical Connectivity (SDC & LSP)

High Availability supports various circuit types, including: 1G, 10G, and 40G Ethernet. 1G & 10G connections are available in all locations, 40G is available in 111 8th Ave, 165 Halsey, Secaucus, Carteret, and 350 East Cermak. The Ethernet handoff to the client will be the following specification for all locations other than Mahwah:

1G	Single-Mode
Ethernet Standard	1000Base-LX
Source Wavelength	1310nm
Receiver Sensitivity	-20dBm
Distance	10km limit using 9/125µm
Connector	LC

10G	Single-Mode
Ethernet Standard	10GBase-LR
Source Wavelength	1310nm
Receiver Sensitivity[2]	-15dBm
Distance[3]	10km[4] limit using 9/125µm fiber
Connector	LC

40G	Single-Mode
Ethernet Standard	40GBASE-LR4
Source Wavelength Per Lane	Lane 0– 1264.5 nm through 1277.5 nm Lane 1– 1284.5 nm through 1297.5 nm Lane 2– 1304.5 nm through 1317.5 nm Lane 3– 1324.5 nm through 1337.5 nm
Receiver Sensitivity Per Lane[5]	–13.7 dBm
Distance[6]	10km[4] limit using 9/125µm fiber
Connector	LC

---

[2] Customer power received at interface must be equal to or greater than this value.
[3] Power level at handoff is the limiting parameter, not distance.
[4] Fiber distance not to exceed 10km even if the fiber budget can be attained due to residual dispersion distortion.
[5] Customer power received at interface must be equal to or greater than this value.
[6] Power level at handoff is the limiting parameter, not distance.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

100G	Single-Mode
Ethernet Standard	100GBASE-LR4
Source Wavelength Per Lane	Lane 0–1294.53 through 1296.59 nm Lane 1–1299.02 through 1301.09 nm Lane 2–1303.54 through 1305.63 nm Lane 3–1308.09 through 1310.19 nm
Receiver Sensitivity Per Lane[8]	–10.6 dBm
Distance[9]	10km[10] limit using 9/125µm fiber
Connector	LC

6.3.5 High Availability Address Space (SLC, SDC & LSP)

Customer IP Address Space

ICE Global Network customers are encouraged to use the registered IP address range(s) for connectivity. If the registered IP addresses are not available, ICE will assign the IP addresses from a predefined private IP range. Customers may choose to implement Network Address Translation (NAT) to present a globally registered IP address to High Availability; however, NAT may limit customers' ability to take advantage of redundant connections seamlessly and could interfere with the functionality of the applications that rely on knowing the true IP address of the end device.

Network Address Translation / Proxy

High Availability does not use NAT or proxy services. Each customer connection is filtered to receive the authorized set of routes and services.

NOTE that the exception to this is ICE Global Network wireless services with detail outlined later in section 7.2.

Networking BGP Peering

Customers' will exchange IP routes with High Availability using BGP. The BGP addresses for peering will be allocated by the Customer Engineering Team as part of the customers install package.

IMPORTANT: BGP peering addresses must be allocated by ICE Global Network, customer provided IPs cannot be accomodated

---

[8] Customer power received at interface must be equal to or greater than this value.
[9] Power level at handoff is the limiting parameter, not distance.
[10] Fiber distance not to exceed 10km even if the fiber budget can be attained due to residual dispersion distortion.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

BGP Hold Times

Customers should set their BGP settings to peer with HA as follows:

hold time value: 20 seconds
keep alive interval: 6 seconds

BGP Autonomous System Information

The Autonomous System number for HA is as follows:

US – HA ASN: #26585

BGP Unicast Routes advertised

HA will advertise IPv4 routes for all public unicast services in the Data Center. Colocation customers should accept those routes that are required for the products they purchase. Route information per-product will be provided during the provisioning process.

Multicast

The primary method of multicast distribution within the ICE and NYSE Data Centers is via PIM-SM (Protocol Independent Multicast-Sparse Mode). Using this protocol, customers are able to subscribe to the multicast feeds of their choice and have the option of taking multiple connections that can be used for resiliency with dynamic recovery or separation of redundant multicast feeds, over the HA network. Colocation customers should consider deploying network equipment which supports both PIM-SM and BGP.

For customers that do not require dynamic recovery between their HA links, the option exists to be statically provisioned for multicast services with the following restrictions; dynamic (PIM-SM) and static (IGMP) multicast configurations may not be mixed on the same interface.

For NYSE's products, ICE Global Network distributes multicast in a dual-stream configuration, providing a duplicated 'A' stream and 'B' stream for redundancy. For more information, please consult the product specification for the multicast data of interest. This can be found at https://www.nyse.com/market-data/real-time.

Multicast Source Routes

Routes for all services multicast sources will be sent to High Availability multicast customers via BGP. Customers are responsible to configure their equipment appropriately if they wish to balance or separate 'A' and 'B' multicast traffic when multiple High Availability links are used.

PIM-SM Rendezvous Points

Colocation customers using PIM-SM to dynamically receive multicast products from High Availability should configure their side to point to the High Availability PIM Rendezvous-Point (RP) for the specific multicast products ordered. High Availability provides RP redundancy using Anycast, and customers must statically configure the RP Anycast address in their equipment. High Availability does not support Auto-RP, BSR, or other dynamic RP discovery protocols.

The IP address of the Data Center RP for NYSE Core multicast services, along with the associated multicast group(s) and source(s) information, will be provided to the customer during the provisioning process.

For customers who choose to receive NMS (CTS/CQS/OPRA) services over High Availability connections, the multicast RP, group(s) and source(s) information will be provided during the provisioning process. The RP information used for NMS services

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

will be independent of that used to provide NYSE Core multicast services in the Data Center. The route to the NYSE Data Center, including NMS (CTS/CQS/OPRA), ICE & relevant third party service RPs' will be announced to the customers via BGP.

Rate Limiting

High Availability interfaces are configured with ingress (from the customer into High Availability services) rate limits on a per-product basis. Each product has a base rate limit, which may be customized on a case-by-case basis.

Rate limits are added, but not shared. For example, if a customer purchases two products, each with a 50M rate limit, the customer may send 50M for each product simultaneously, for a total of 100M. The customer may not, however, send more than 50M of traffic for either product. The BGP, PIM-SM and other protocol traffic will be restricted to levels appropriate for the protocol. HA will silently discard inappropriate network control traffic at the HA edge. Traffic destined for the IP ranges of the ICE & NYSE Markets and Services and to third party financial industry content service providers that have been provisioned will be allowed; other IP traffic will be silently discarded.

Connection Monitoring

Each customer's HA connection has the ability to be monitored on-demand, non-intrusively, via atap on the connection. This connectivity model does not impact latency or line performance.

6.4 High Availability Virtual Control Circuit (VCC)

HA VCC is a Layer2 network connection that provides point-to-point connectivity between any two customer ports from HA Access Centers to Data Centers HA port (i.e. SDC).

6.4.1 VCC Connectivity Options

There are three types of VCC service offerings:

Inter-Region without protection:
Allows a customer to be configured through any nodes between the US and EU HA regions. The VCC node configuration is allowed only on either the RED to RED or BLUE to BLUE HA rings respectively. There is no failure recovery between the regions with this VCC model. Failures within a region, however will have automatic protection and recovery.

Inter-Region with protection:
Allows a customer to be configured through any nodes between the US and EU HA regions. The VCC node configuration is allowed over any combination of the RED and BLUE HA rings. In this VCC model any failure will result in automatic recovery within a region and between regions.

Intra-Region:
Allows a customer to be configured through any nodes within a HA region either in the US or EU. The VCC model does not span across regions and provides automatic VCC protection and recovery in the event of a failure within the region.

VLANs

Customer connections via VCC services must be configured for 802.1q trunking to support VLAN tagging.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

6.5 ICE Global Network Optic

ICE Global Network Optic is a Layer 1 fiber-optic based, private circuit option for customers who require a direct circuit from the USLC in Mahwah to any of the locations listed below. At each of these locations it must be terminated on equipment belonging to the customer or a third party telecommunications carrier.

Each Optic circuit is provided to the customer with an Ethernet handoff, at a speed of either 1G, 10G or 40G, and is transported over ICE Global Network's dark fiber based optical systems using Ethernet over DWDM technology. IGN Optic is non-redundant, point-to-point connectivity solution and redundancy is achieved by customers using a second optical circuit to a diverse location chosen from any of the destinations listed below.

There are six IGN Optic systems using three fully diverse dark fiber routes with separate entry points into the Liquidity Center building.

Available IGN Optic Destinations	City	State	Zip
32 Avenue of the Americas	New York	NY	10013
111 8th Ave *	New York	NY	10011
165 Halsey St *	Newark	NJ	07102
300 Boulevard E	Weehawken	NJ	07086
360 Hamilton Ave	White Plains	NY	10601
800 Secaucus Rd *	Secaucus	NJ	07094
1400 Federal Blvd *	Carteret	NJ	07008

* Access Centers offering 40G IGN Optic

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

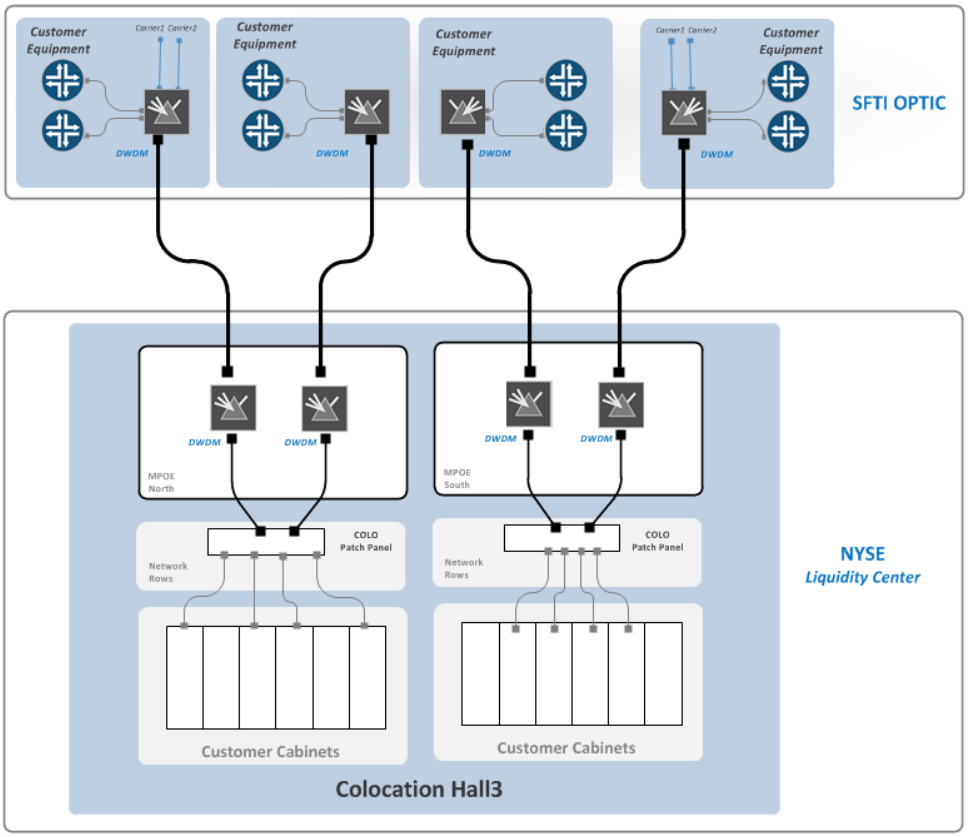

(Figure 9) – IGN Optic

6.5.1 ICE Global Network Optic Physical Connectivity

Liquidity Center Physical Specification

Within the Liquidity Center, ICE will provide a pair of 850 nm multi-mode LC fibers into the customer's Colocation cabinet for each IGN Optic circuit purchased. The fiber pair will be terminated on a patch panel in the customer's Colocation cabinet, with an LC connector. Customers are responsible for providing a patch cable from the patch panel to their equipment.

Access Center Physical Specification

Within the Access Centers, customers have two options for terminating their IGN Optic – AC circuit. The circuit can be extended to the customers' equipment within the carrier hotel or the circuit can be extended to a third-party provider circuit. ICE will provide an Ethernet handoff as outlined below.

6.5.2 ICE Global Network Optic Logical Connectivity

IGN Optic provides Ethernet over DWDM connectivity to customers. The service provides full end-to-end transparency. The service will transport customer MAC address information and VLAN information across the circuit, but will not directly interact with the customer's Ethernet CPE.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

6.5.3 Optical Interfaces

1G	Multi-mode	Single-mode
Ethernet Standard	1000Base-SX	1000Base-LX
Source Wavelength	850nm	1310nm
Receiver Sensitivity	-17dBm	-20 dBm
Distance	500m limit using 50/125 µm fiber	10km limit using 9/125 µm

10G	Multi-mode	Single-mode
Ethernet Standard	10Gase-SR	10Gase-LR
Source Wavelength	850nm	1310nm
Receiver Sensitivity (11)	-12dBm	-15dBm
Distance (12)	300m limit using 50/125 µm, OM3 fiber (2000MHz-km)	10km(13) limit using 9/125 µm fiber

40G	Multi-mode	Single-mode
Ethernet Standard		40GBASE-LR4
Source Wavelength		Lane 0– 1264.5 nm through 1277.5 nm Lane 1– 1284.5 nm through 1297.5 nm Lane 2– 1304.5 nm through 1317.5 nm Lane 3– 1324.5 nm through 1337.5 nm
Receiver Sensitivity (14)		-15dBm
Distance (15)		10km (16) limit using 9/125 µm fiber

6.5.4 Monitoring

ICE provides end-to-end monitoring of the IGN Optic circuits. This includes performance monitoring, troubleshooting, and fault management on a per channel and overall system basis. This does not include the capability of capturing and analyzing customer application data.

6.6 ICE Global Network Optic Connect

IGN Optic Connect is a point-to-point Ethernet circuit (1G, 10G or 40G) or a dark fiber (DF) from the Mahwah USLC to a customer-specified location. IGN Optic Connect can be used to extend a IGN Optic circuit to a customer-specified location. It can also be ordered as a standalone circuit when one end, the "Z" Side, terminates in a ICE Global Network Access Center fiber panel. It has three components:

1. One third party circuit,

---

[11] Customer power received at interface must be equal to or greater than this value.
[12] Power level at handoff is the limiting parameter, not distance.
[13] Fiber distance not to exceed 10km even if the fiber budget can be attained due to residual dispersion distortion.
[14] Customer power received at interface must be equal to or greater than this value.
[15] Power level at handoff is the limiting parameter, not distance.
[16] Fiber distance not to exceed 10km even if the fiber budget can be attained due to residual dispersion distortion.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

2. One cross connect at a IGN Access Center location,

3. One cross connect at the customer-specified location

For the IGN Optic Connect offering:

- ICE Global Network is responsible for the third party circuit procurement, implementation and ongoing maintenance
- ICE Data Services is the single point of contact for the service
- ICE Global Network is also responsible for the Access Center cross connect
- Latency figures are measured and not guaranteed. Service Level Agreements (SLAs) do not apply.
- Listed circuit type options below is subject to availability at the selected ICE location.
- Customers are responsible for the cross connect at their specified location

** Note: Only Avialable to existing IGN Optic Customers

6.7 Liquidity Center Cross Connect (LCX)

Liquidity Center Cross Connect (LCX) is a Layer 1, physical connectivity option which provides point to point connections delivered over single-mode (SM) or multi-mode (MM) fiber between two Mahwah USLC customers' cabinets and terminated on ICE provided patch panels.

LCX permits two cabinets, owned by the same customer or two different customers to connect their network environments together via a multi/single-mode fiber handoffs. LCX is sold in units of 1, 6, 12, 18, and 24 pairs of fiber.

LCX is limited to these deployments:

- Connections between a customer's non-contiguous cabinets
- Interconnects between two customers' cabinets
- Connections between a customer and a vendor; except when vendor is providing trade execution or matching. In this scenario a vendor must become a CSP of either LCN CSP or High Availability to provide these services[17].
- Connections between a Sponsored Participant and a Sponsor whose cabinets are not contiguous

6.7.1 LCX Physical Connectivity

Within the Liquidity Centers, customers have two options for terminating optical circuits. Colocation customers will be provided a handoff of a number of pairs of 850nm OM3 multi-mode and 1310nm SMF (single-mode Fiber) with standard LC Connections[18]. These fiber trunks will extend from the cabinet assigned to the customer into a patch panel within a common communications rack in the Colocation Hall. Cross connects can be provided from this point to any of the approved endpoints; as specified above.

1G	Multi-mode	Single-mode
Ethernet Standard	1000Base-SX	1000Base-LX
Source Wavelength	850nm	1310nm
Distance	500m limit using 50/125 µm OM3 Fibre	5 km over 10 µm single-mode fiber

10G	Multi-mode	Single-mode
Ethernet Standard	10GBase-SR	10GBase-LR

---

[17] This restriction is required so that all exchanges and ATS are operating in a similar fashion.
[18] Additional connectors are available upon request.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

Source Wavelength	850nm	1310nm
Distance	300m limit using 50/125µm, OM3 fiber	10 km over 10 µm single-mode fiber

40G	Multi-mode	Single-mode
Ethernet Standard	40GBASE-SR4	40GBASE-LR4
Source Wavelength	4 media x 850nm	4 Lanes
Distance	300m limit	10km using 9/125 µm fiber

6.7.2 Administration of the Cross Connect

ICE provides the connection and maintains the physical state of the connection, but does not administer or provide for any traffic flow that occurs over the LCX connection.

6.8 ICE Global Network VPN Access – IP based VPN

ICE Global Network VPN Access is an IPsec based LAN-to-LAN connection via Internet providing a secure, encrypted transport across the internet for all unicast sessions. Customers can securely connect to ICE Global Network unicast services using their own IPsec devices and Internet connections and variable bandwidth options are available, from 1M to 10M. VPN can be used for access to ICE (inc. SuperDerivatives), NYSE Core and selected third party content unicast services.

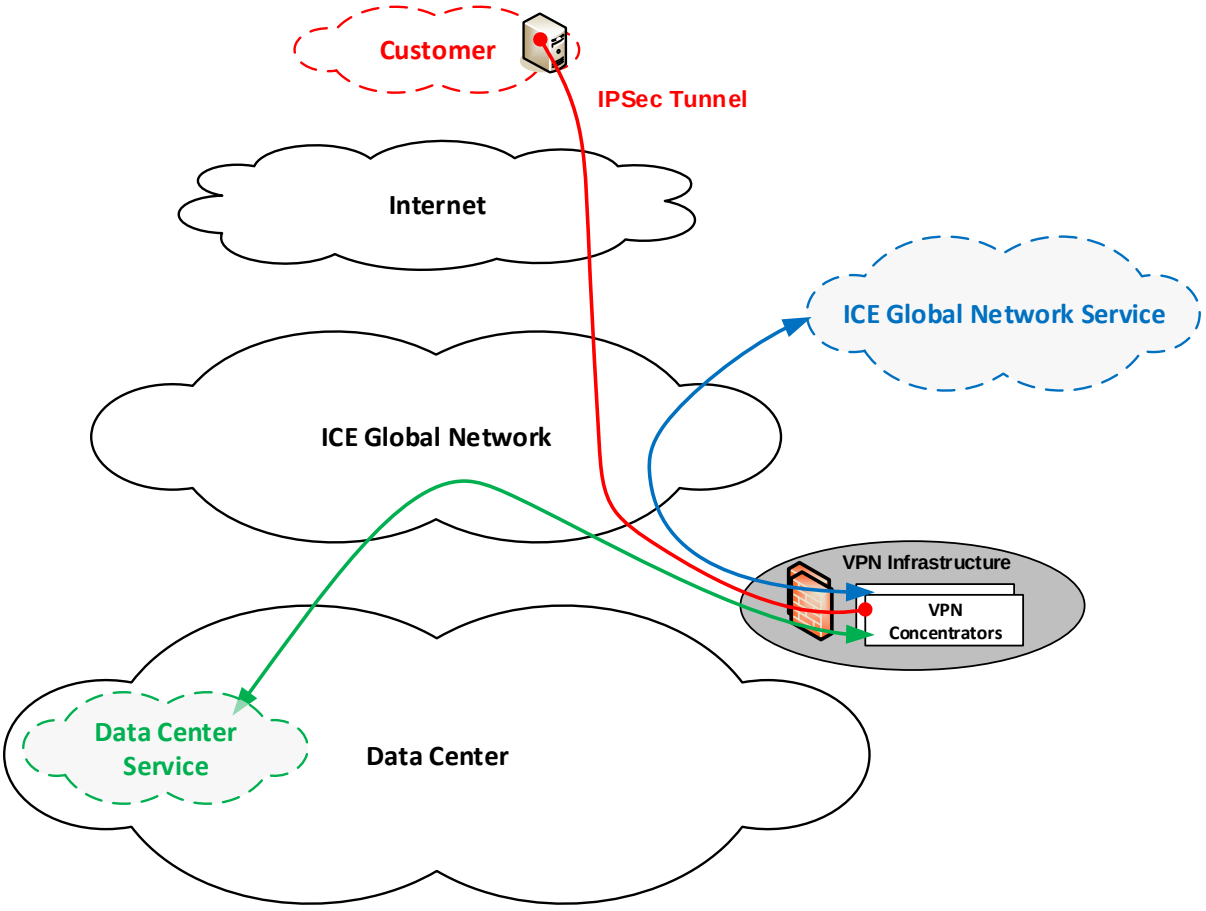

(Figure 10) – ICE Global Network VPN Access

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

6.8.1 Connectivity (LAN to LAN)

Customers will use their own IPsec enabled devices and Internet connections to access ICE Global Network VPN. The VPN tunnel encryption method will be agreed upon during provisioning process. Customers will be able to access ICE Global Network VPN services using ICE Global Network assigned RFC1918 IP addresses.

6.8.2 ICE Global Network VPN: Network Considerations

- Customers must have an IPsec enabled device and Internet connection at their end
- An IPsec enabled device could be either a router capable of IPsec or a firewall with VPN capability and customers are responsible for configuring and supporting their IPsec enabled device.
- Connectivity is via IPSEC tunnels only, direct internet connectivity is not supported
- Customer must ensure that any Internet facing firewall has its security policy amended to allow the following protocols:
    - IKE – UDP port 500 (Internet Key Exchange)
    - IPsec over NAT-T – UDP port 4500
    - ESP – Protocol 50 (IPSec)
- It is important that the IPsec device has a static public IP address assigned to the interface which creates the VPN tunnel
- Customer needs to NAT their host LAN IP addresses to ICE Global Network assigned private IP range

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

7. Low Latency Services

7.1 Low Latency Network (LLN)

LLN is a low latency connectivity option which uses optimized network technology and the fastest available fiber routes between the USLC in Mahwah and key US tradinglocations of Secaucus and Carteret.

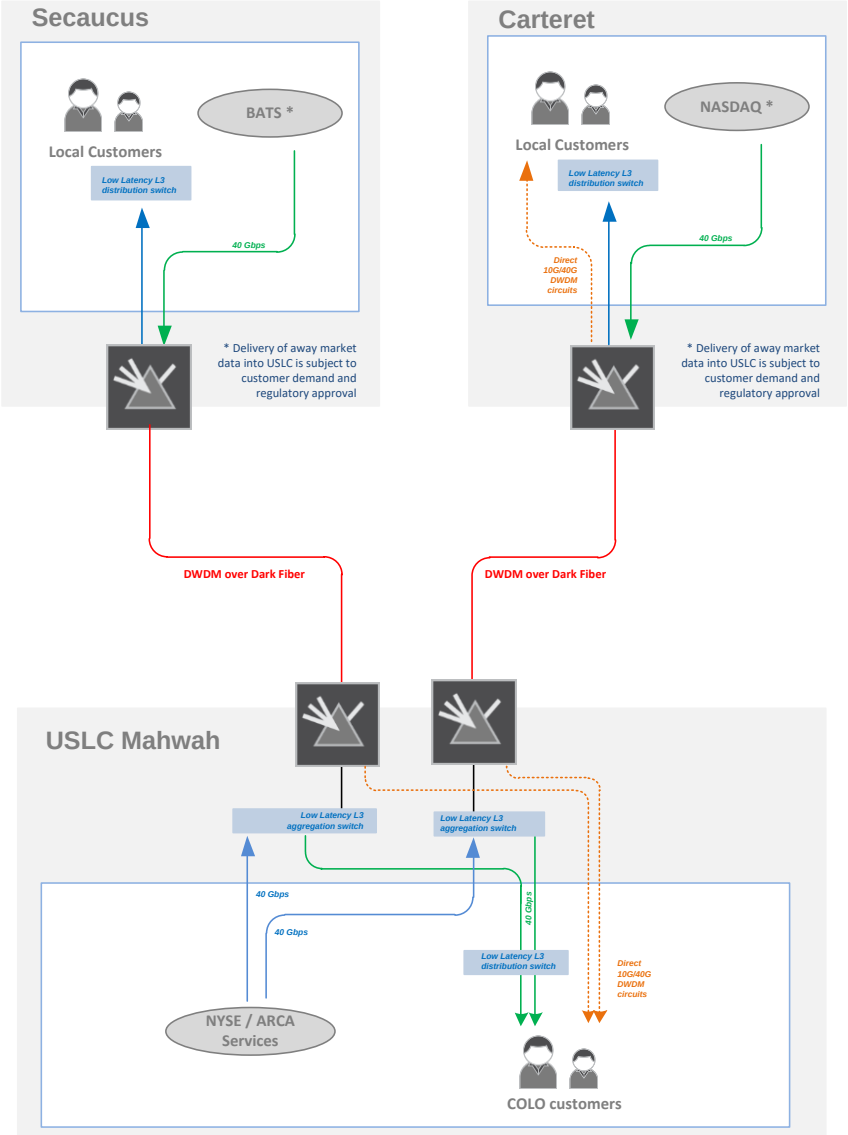

(Figure 11) – IGN Wireless

7.1.1 LLN Highlights

- Market access ports in Secaucus and Carteret are available at either 10Gbps or 40Gbps speeds
- Raw bandwidth (circuits) are available on both routes (10Gbps or 40Gbps)
- LLN utilizes the fastest commercially-available fiber links between Mahwah and Secaucus and Mahwah and Carteret
- Uses the fastest carrier grade optical switching hardware available along the entire path

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

- A customer with a traditional HA port can add a LLN port to decrease end-to-end latency, however it should be noted that LLN only offers a subset of the services available over the global ICE Global Network wide area network.

IMPORTANT: LLN is a single path, point-to-point network solution only. Unlike other High Availability options, it does not offer resilience in case of issue along the route and customers must ensure resiliency via an alternative ICE Global Network product or provider.
It is also designed to provide access to USLC (NYSE) production services only (proprietary market data and order entry), NYSE Group test, certification and DR services, along with ICE and other third party content cannot be accessed via LLN.

*7.1.2 LLN Latency **

The expected one way, end to end latency profile for the LLN infrastructure outlined in the table below. This measurement is based on 128 byte average packet size with store and forward components in the path. The listed values include the Mahwah circuit extension to the network equipment row, but does not include the circuit extensions in Carteret or Secaucus.

Route	10G Customer	40G Customer
Mahwah services to Carteret (to LLN Customer Edge)	344µs	343µs
Carteret services to Mahwah LLN Customer Edge	345µs	344µs
Mahwah to Carteret Optical (DWDM path)	341µs	341µs
Mahwah services to Secaucus (to LLN Customer Edge)	188µs	187µs
Secaucus services to Mahwah LLN Customer Edge	189µs	188µs

*** NOTE**: LLN latencies are one way based on fiber optic distances, average observed by communication equipment latencies and estimated cable latencies. Listed values do not include the cable latency to the service provider interface from the LLN handoff (NYSE/ARCA/NMS, Nasdaq, BATS equipment interface) or the cable latency from the LLN customer edge to the customer interface.

7.1.3 LLN Physical Connectivity

Customers are connected via 10G or 40G Ethernet cabling to the customer edge switch. The following table lists the standards used for both DWDM direct circuit services and IP services:

10G	Multi-mode (Mahwah)	Single-mode (Secaucus / Carteret)
Ethernet Standard	10GBASE-SR	10GBase-LR
Source Wavelength	850nm	1310nm
Distance	300m limit using 50/125µm, OM3 fiber	10 km over 10 µm single-mode fiber

40G	Multi-mode (Mahwah)	Single-mode (Secaucus / Carteret)
Ethernet Standard	40GBASE-SR4	40GBASE-LR4
Source Wavelength	4 media x 850nm using 50/125 µm, OM3 fiber (2000MHz-km)	Lane 0– 1264.5 nm through 1277.5 nm Lane 1– 1284.5 nm through 1297.5 nm Lane 2– 1304.5 nm through 1317.5 nm Lane 3– 1324.5 nm through 1337.5 nm

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

Receiver Sensitivity (19)	-12dBm	-15dBm
Distance	300m limit	10km (20) limit using 9/125 µm fiber

7.1.4 LLN Address Space

Customers' IP Address Space

Each customer's IP addressable entity (logical or physical) that accesses market services requires its own IP address. Given this IP address, LLN is able to route outbound to the customer's device via the access method contracted by that customer (i.e. the address must be reachable). Every IP address that can be assigned to a device is either a globally unique, registered IP address or a private IP address from a range of RFC1918 IPs assigned by ICE/NYSE.

Similar to other ICE Global Network services, customers can use their own public ASN or use a private one provided by ICE.

Network Address Translation / Proxy

The LLN network does not use NAT or proxy services. Each customer connection is filtered to receive the authorized set of routes and services.

7.1.5 LLN Networking Configuration

Only BGPv4 is allowed between the LLN network and customers (pim and igmp). No static routing or IGMP is allowed.

VLANs

IMPORTANT: Customer interfaces to the LLN network will NOT be configured for 802.1Q VLANs and VLAN tagging set by the customer may be ignored or tagged packets discarded. All traffic between the customer and the LLN edge will share a single, non-tagged interface.

7.1.6 Failure Considerations

- As LLN is a non-redundant, point-to-point service, customers must pay attention to all failover scenarios.
- For those connected to both High Availability and LLN, the routing must be carefully configured in order to avoid routing issues.

IMPORTANT: Unicast and Multicast services offered on LLN are already available on High Availability, therefore, customers must adjust their BGP metrics accordingly to ensure they correctly define primary and secondary paths

As an example, a customer can configure better metrics for NYSE ARCA unicast prefixes received over LLN whilst still also accepting the same prefixes from the High Availability connection. The same approach can be applied to multicast routing. Generally, customers are advised to prefer the route toward the NYSE RPs and the multicast source range via LLN.

The key point is to make sure that both paths are available at any given time.

7.2 ICE Global Network Wireless

---

[19] Customer power received at an interface must be equal to, or greater than this value.
[20] Fiber distance not to exceed 10km, even if the fiber budget can be attained due to residual dispersion distortion.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

IGN Wireless Service combines Free Space Optics (FSO) and Millimeter Wave (mmW) technologies to establish point-to-point connectivity between the NYSE Mahwah Data Center and Secaucus and Carteret. Using Anova Technologies LLC as the exclusive partner to deliver this advanced technology, it provides superior reliability and availability when compared to other wireless solutions, while facilitating faster data transfer than fiber.

- Wireless provides :
  - Individual Ethernet circuits (10 to 200 Mbps) L2, raw bandwidth connectivity only; and
  - Market Data services:
    - NYSE & Arca Integrated Feeds in Carteret or Secaucus
    - BATS & Nasdaq selected equities feeds in Mahwah
- Separate physical handoffs are provided for Wireless circuits and Wireless market data

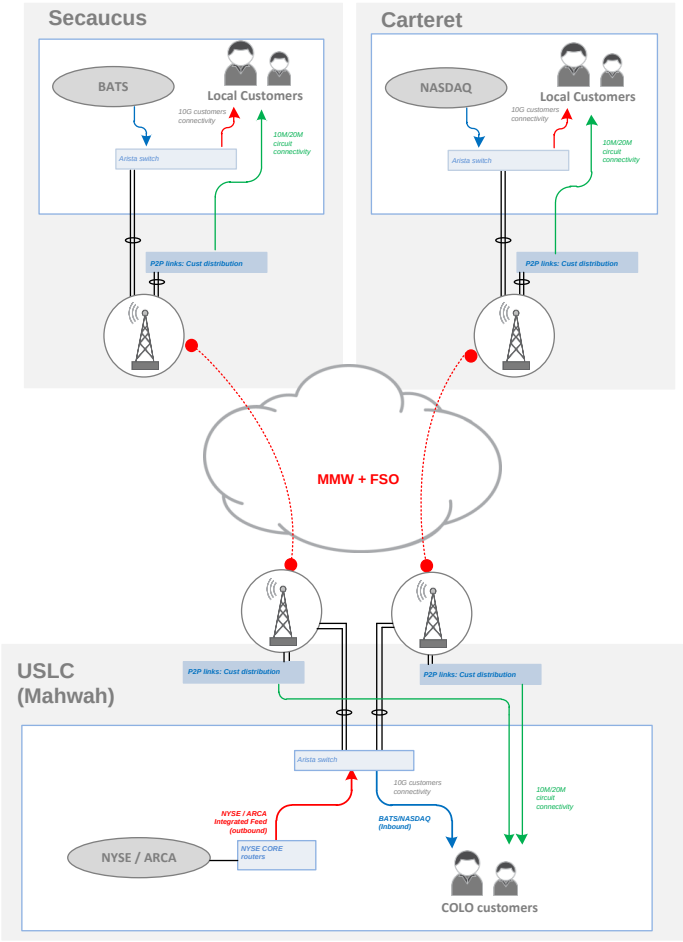

(Figure 12) – IGN Wireless

7.2.1 Technology Highlights

- Utilizes Anova Technologies' Aoptix devices used for wireless transmission use a combination of Free Space Optics and traditional MMW dish technology
- The Dual Spectrum 2G traffic via FSO and MMW streams providing added redundancy and reliability over a single wireless transmission.
- Aoptix Wireless hardware is exclusive to Anova, for financial services use, and in partnership with ICE Global Network is deployed along dedicated routes.
- Realtime monitoring of data quality for market data services only

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

IMPORTANT: Similar to LLN, the Wireless service has been designed around latency and it is important to keep in mind that it has no resiliency mechanisms, outside of the dual spectrum transmission capabilities. Therefore, customers should ensure they have an appropriate backup plan (B Feed via regular HA network; automatic failover design …etc)

7.2.2 Latency & Availability Information

IGN Wireless has both alatency and availability SLA.

7.2.2.1 Latency & Availability

ROUTE	ANTENNA TO ANTENNA LATENCY [21] (MICROSECONDS)	DEMARK TO DEMARK LATENCY [22] (MICROSECONDS)	AVAILABILITY
Wireless Circuits			
Mahwah to Carteret	191.2	194.5	
Mahwah to Secaucus	117.8	121.9	

In the event that the service is unable to deliver the specified latency (greater than 1% over the published latency for a period of more than 1 hour), Customers should raise a service ticket with clientnetworks@theice.com for troubleshooting and SLA validation.

The measurement of availability is 99.9% uptime, excluding Excused Outages. There are two components to availability:

- Bit Error Rate (BER) and hours of operation. The service will be deemed unavailable during any period where the BER exceeds 10-7 for greater than a one minute interval during the hours of operation.
- Hours of operation are Monday - Friday: 7:00 AM to 9:00 PM (EST) with the exception of NYSET holidays and Excused Outages.

7.2.3 IGN Wireless Circuits (Raw Bandwidth)

Wireless circuits are delivered via Ethernet handoff directly on the FPGA device and available in segments of 10 & 20Mbps. Customers are allowed to order up to 200Mbps raw circuit bandwidth on any one route

7.2.4 IGN Wireless Circuits Physical Connectivity

10G	Multi-mode (Mahwah)	Single-mode (Secaucus / Carteret)
Ethernet Standard	10GBase-SR	10GBase-LR
Source Wavelength	850nm	1310nm
Distance	300m limit using 50/125µm, OM3 fiber	10 km over 10 µm single-mode fiber

LOCATION	MAHWAH	CARTERET	SECAUCUS

---

[21] Carteret latencies are one way and measured using RFC 2544 test. Secaucus latencies will be measured when the route is commissioned (target end Feb 2016).

[22] Demark to Demark latency for Carteret includes fiber lengths. Secaucus latency does not include the local fiber tail. When the Secaucus route is complete and tested, actual latency will be provided.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

ADDRESS	1700 MacArthur Blvd, Mahwah, NJ, 07430	1400 Federal Blvd, Carteret, NJ, 07008	800 Secaucus Road, Secaucus, NJ, 07094
CAGE/SUITE	Colocation Hall 3 Network row	ATC Tower	Equinix NY5:01 Cage 51456
CROSS CONNECT RESPONSIBILITY	ICE Global Network delivers to patch panel for the customer's cab or cage	ICE Global Network (Anova) provide LOA/CFA Customer orders cross-connect	ICE Global Network (Anova) provide LOA/CFA Customer orders cross-connect

7.2.5 IGN Wireless Circuits: Network Considerations

- Maximum supported frame size is 2048 bytes. Anything over this size will be discarded.
- The service is handed off directly from the Aoptix hardware to each customer and therefore no monitoring or TAPing of customer connections takes place.
- There is no hardware-related latency difference between the 10 and 200 Mpbs service. No support for 802.1q tagged packets.

7.2.6 IGN Wireless Market Data

IGN Wireless Market DataWireless market data distribution uses separate and dedicated Aoptix FSO/MMW equipment to that used to deliver the raw bandwidth (circuit) service. Customers located in the Mahwah DC and remote access centers are directly connected to a low latency edge switch to receive their requested market data feed(s). Similarly, all exchange data is connected to the edge via 10Gb Ethernet connections for out-bound market data service distribution.

7.2.7 IGN Wireless Market Data Physical Connectivity

Customers are connected via 10Gb Ethernet cabling to the edge switch demarcation point. The following table lists the standards used:

10G	Multi-mode (Mahwah)	Single-mode (Secaucus / Carteret)
Ethernet Standard	10GBase-SR	10GBase-LR
Source Wavelength	850nm	1310nm
Distance	300m limit using 50/125µm, OM3 fiber	10 km over 10 µm single-mode fiber

Location of market data edge hardware:

LOCATION	MAHWAH	CARTERET	SECAUCUS
CAGE/SUITE	Colocation Hall 3 Network row	Cage 533	Equinix NY5: Cage 51223
CROSS CONNECT RESPONSIBILITY	ICE deliver to patch panel for the customer's cab or cage	Customer provides LOA/CFA ICE orders cross-connect	Customer provides LOA/CFA ICE orders cross-connect

7.2.8 IGN Wireless Market Data: Network Considerations

Network Address Translation / Proxy

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

IGN Wireless offers multicast market data services both inbound and outbound from Mahwah. Outbound services, to Carteret and Secaucus, are the NYSE & Arca Integrated Feeds. Inbound market data services are Nasdaq and BATS data.

- Data services are NATed, offering a "C" feed
- Public IPs have been allocated to alleviate the potential for conflict with existing customer or data routes
- Data will be multicast only, no unicast services or retransmission
- All multicast group and source information used on the wireless service can be found at: https://www.nyse.com/publicdocs/nyse/data/IP_Addresses.xls

Interface configuration:

The customer port is configured without VLAN tagging. Each customer will be assigned an RFC1918 /30 subnet as a transit point-to-point network.

Routing protocols:

Only BGPv4 is allowed.. No static routing or IGP allowed. Similarly to High Availability, customers can use their own public ASN or use a private one provided by ICE. Only NATed public source ranges will be advertised on the customer peerings. As there are no Unicast retransmission services over this link, no prefixes will be accepted from the customers.

Multicast subscription:

The IGN Wireless network doesn't support PIM or IGMP membership, the market data will be flooded on the customer ports based on the client entitlement. It is important from a customer perspective to accept the multicast stream and use it for directly connected receivers. Alternatively, customers can register it against internal Rendezvous points for remote consumption.

7.2.9 Failure Considerations

- As LLN is a non-redundant, point-to-point service, customers must pay attention to all failover scenarios.
- For those connected to both High Availability (HA) and LLN, the routing must be carefully configured in order to avoid routing issues.

IMPORTANT IGN Wireless is a non resilient service; therefore, it is important to take this into account in operational procedures. For instance, customers can treat it as an isolated service with dedicated multicast feed receivers while maintaining other receivers for ICE Global Network. Alternatively, customer can chose to use one set of feed receivers but ensure that they can manually switch back to ICE Global Network based streams in case of an issue with the wireless network

In order to maintain clear separation between the wireless market data service and the regular ICE Global Network market data service, all the multicast groups and sources will be presented with different addresses to customers using NAT. This avoids confusion, asymmetric routing and any potential PIM RP mapping issues for customers connected to both networks. Besides, the wireless service offers a limited subset of the products available on ICE Global Network which makes the NAT mandatory as the same source may be publishing products only available on ICE Global Network as well as streams available on the wireless network

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

8. Content Service Providers (CSPs)

Content Service Provider (CSP) is a third party provider of services to the financial industry, including but not limited to order routing, order matching, market data, trade clearing, and settlement. A list of CSPs available on ICE Global Network can be obtained through your account manager. CSPs have the following attributes:

Mandatory:

- Connects to a minimum of two ICE Global Network devices over diverse paths for resiliency.
- Advertises publicly registered IP addresses.
- Accept publicly registered IP address from ICE Global Network clients.

Optional:

- Provide unicast services, with bandwidth policed at the ingress in to ICE Global Network.
- Provide multicast services, with bandwidth policed at the ingress in to ICE Global Network.
- Accept privately registered IP addresses for clients that don't had public address space.

Limitations:

- Limit unicast services by bandwidth. (i.e. customer may subscribe to the service, it but might not have enough bandwidth for it to work correctly.)
- Limit multicast services by filters. (i.e. Once the filter is open, customer can get the service and the only bandwidth limitations are due to capacity or the customer port, ICE Global Network backbone, or CSP ingress interface into ICE Global Network.)

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

9. Application Services

9.1 High Availability Virtual Local Area Network (VLAN)

Ice Global Network provides a wide range of services to the financial industry, some of which include, order routing, order matching, market data, trade clearing and settlement.

A list of Application Services available on ICE Global Network can be obtained through your account manager. All applications services have the following attributes:

- Connects to a minimum of two ICE Global Network devices over diverse paths for resiliency.
- Provide unicast services, with bandwidth policed at the ingress in to ICE Global Network.
- Provide multicast services, with bandwidth policed at the ingress in to ICE Global Network.
- Advertises publicly registered IP addresses.
- Accept publicly registered IP address from ICE Global Network customers.
- Accept privately registered IP addresses for customers that do not have public address space.
- Limit unicast services by bandwidth. (i.e. customer may subscribe to the service, it but might not have enough bandwidth for it to work correctly.)
- Limit multicast services by filters. (i.e. Once the filter is open, customer can get the service and the only bandwidth limitations are due to capacity or the customer port, ICE Global Network backbone, or CSP ingress interface into ICE Global Network.)
- Customer connects to HA VLAN using standard interface configuration

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

10. Carrier Meet-Me Room Services

Telecommunication providers (Telcos) have access to two Meet-Me-Rooms (MMR) located on the north and south ends of the first floor of the USLC. The MMRs provide a space for installing equipment and terminating fiber optic cables. Telcos are welcome to store multiplexing equipment in the MMRs to provide their customers with a single connection between the MMR and the equipment outside of the MMR. This will allow for a direct and private connection to a several other organizations residing within the two MMRs. Utilizing the MMRs for storing and/or installing additional equipment is strongly discouraged.

10.1 Engineering Consideration

The two MMR's are fed by three Point of Entry (POE) rooms; entering at the east, north, and northwest sides of the building. Each POE connects to a dedicated zero-manhole at the property line of the Mahwah facility. An ICE owned conduit system connects each POE to its associated zero-manhole.

The north and northwest zero-manholes have a limited amount of outwardly facing 4 inches conduits which extend beyond the property line. Telco's that contract for services in Mahwah can request access to one conduit in each of these zero-manholes. The east zero-manhole is different in that the outwardly facing conduit system is fully built out and ICE will assign carriers to inner-ducts. Each Telco will be fully responsible for extending their fiber optic cable into the Mahwah USLC facility. This includes, but is not limited to, the build to ICE's zero-manholes by intercepting existing 4 inches conduits if required, pulling of fiber, any necessary civil works, and the associated legal agreements with third parties.

	Distance Between Zero-manhole - MMR	
Zero-manhole	**MMR**	**Length (FT)**
East	South	1260
North	South	985
Northwest	South	1150
East	North	1075
North	North	600
Northwest	North	1495

10.2 MMR Layout

There are two facility rooms which are located at the north and south sides of the Mahwah USLC which are dedicated for carriers to land their communications equipment. Rack space in these facilities is separated into two basic components; "Carrier Frames" and "Distribution Frames". It is from these locations which carriers may extend their network equipment and connect to Colocated customers' equipment in Hall 1, 2, and 3. To extend these connections each carrier frame will have a dedicated fiber patch panel with 96 strands of 10 µm single-mode fiber (SMF) and 48 strands of OM3 50 µm multi-mode fiber (MMF) with LC connections pulled into the Main Distribution Frame (MDF); from this point, fiber cross connects are made to fiber trunks which extend out to network cabinets in the Liquidity Center Halls.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

10.2.1 Power Specifications

Branch circuits from Power Distribution Units (PDU) provide the Telco's cabinet with either 4 or 8 kilowatts of power. One PDU provides 'A' feed power while the other provides 'B' feed power. Each 4 kilowatts cabinet has two branch circuits, one from each of the PDU. Each branch circuit is a single phase, 208VAC feed fused at 30 amps generating 6.24 kilowatts of power. Both branch circuits are monitored (each should carry half of the 4 kilowatts load) with an alarm in place for notifying the facilities should the two branch circuits total power exceed 4 kilowatts.

10.2.2 Technical Specification

Power Strip

Two vertical power strips are provisioned with a 4kW order and four strips are provisioned with an 8kW order. A 4kW cabinet has its power strips installed on one side of the cabinet. An 8kW cabinet has its power strips installed two on each side of the cabinet. Each power strip plugs into a L14-30 outlet installed above the cabinet. Additional power strip outlet configurations and power outlets are available; customers are responsible for providing the appropriate cables. Each strip is fused with the following standard configuration:

- Outlet Size: 30 A, 208 VAC (18 x IEC C-13 + 6 x IEC C19) single phase – single strip
- Outlet Size: 30 A, 120 VAC (6 NEMA 5-20R) single phase – single strip
- Local Meter

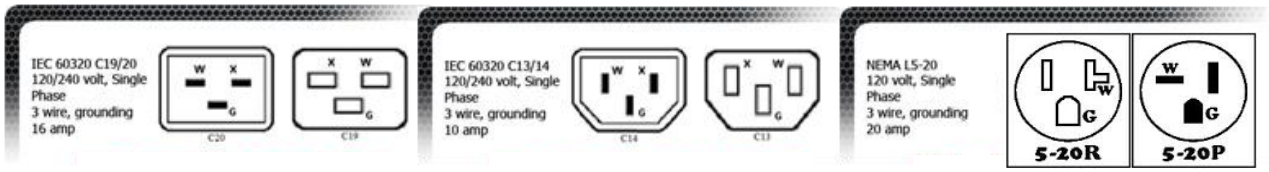

(Figure 13) – Standard Power Cable Connectors

Cabinet

- Manufacturer: Rittal Corporation
- Size: 52 RU
- Dimensions (Depth × Height × Width): 41.33 in. × 96.4 in. × 27.55 in.
- 19 in. mountable rails

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2020. All Rights Reserved.

Appendix A. ICE Global Network Connectivity Options Summary

Available Network Connectivity Options	
LCN	A Local Area Network (LAN) within the Data Center that provides local connectivity to resources residing in the data halls.
LCN – NMS	Access to the National Market Systems NMS (CTS/CQS/OPRA) over existing LCN connections.
IP Liquidity Center	An IP-based Wide Area Network (WAN) service designed to connect Datacenter collocated customers to local and remote ICE:NYSE market systems and third party CSPs
High Availability Direct Connection - SDC	High Availability Direct Connection (SDC) enables firms to use their own Ethernet connectivity to connect with ICE Global Network at geographically diverse and vendor-neutral HA Access Centers outside of the data centers.
VCC	A transparent Layer 2 VPN from HA Access Center to Data Center used to connect customers to their Colocation environments. Customers' existing SLC, or SDC can be utilized.
LLN	Point to point fiber services between USLC in Mahwah and Carteret & Secaucus Access Centers. Access to all NYSE Core & Premium services including NMS.
Optic	A point to point Ethernet service to connect customer's Colocation environments in the Data Center to ICE Global Network Access Centers using Dense Wave Division Multiplexing (DWDM) technology.
Wireless	Point to point hybrid wireless service using Anova Technologies' MMW/FSO Aoptix technology. Provides select market data feeds and raw bandwidth services.
Liquidity Center Cross Connects (LCX)	A Layer 1 network providing connections exclusively between non-contiguous intra-customer racks in the Colocation halls.
VPN	Low cost ICE Global Network access point via virtual private network over the internet, secure VPN tunnel. Supports unicast services up to 10Mbps.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2019. All Rights Reserved.

Appendix B. Technical Terms and Acronyms:

Acronym/Term	Meaning
802.1Q	An IEEE standard for exchanging VLAN information between Ethernet switches by using tags in the TOS field of the IP header.
Access	(1) Communications connectivity, as in direct access customer. (2) The ability to work with a specific subset of the data managed by ICE Global Network, as in access control and authorization.
Access Center	An Infrastructure location where customer connects to ICE Global Network services and can rent Rack Unit (RU) space to host network kit in support of their ICE Global Network connection.
AMEX	American Stock Exchange
AS	Autonomous System: A set of networked devices owned and operated by the same entity. More formally, a distinct network recognized as operated by a single organization and assigned a unique identifier known as an AS number.
BGP	Border Gateway Protocol: A protocol for exchanging route information between Layer 3 network devices, defined in RFC 1771. This protocol is most often used to connect networks to the Internet.
BGP Peer	Two routers that maintain a TCP connection via BGP for the purpose of exchanging BGP route table information. For more information, see RFC 1771.
CAP	Common Access Point (Common Access Point Network for NYSE markets located in the USLC): Provides access to NYSE production systems and services. Both Production and Test options are available
Core Market Data	Market data offered over the ICE Global Network which includes some of the market data generated by NYSE's USLC hosted exchanges, such as: NYSE, NYSE MKT, NYSE Arca, NYSE Amex & NYSE Bonds,
CSP	Content Service Provider: A third party provider of services to the financial industry
CSP Network	Content Service Provider Network: An access point to the Liquidity Center Network for third parties to provide services to USLC Colocation customers.
Customer	Any person or entity that has contracted for NYSE Technologies Connectivity services
DNS	Domain Name Services: A network protocol to maintain a distributed database able to link IP addresses to alphanumeric names and respond to client queries with this association and other related information.
DWDM	Dense Wave Division Multiplexing: A technology that expands useful bandwidth on fiber optic cable by transmitting data via different light wavelengths simultaneously.
Data Hall	An independent room in the data center intended as an operating environment for IT equipment
Ethernet	A standard for Layer 2 network connectivity as defined by the IEEE standard 802.3

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2019. All Rights Reserved.

Acronym/Term	Meaning
Extranet	A non-public network intended to give system or network access to a set of outside entities that have individual intranets.
Extranet Provider	Any external vendor that connects to ICE Global Network for the purpose of redistributing ICE Global Network services to remote customers, often with additional access methods or protocols for the convenience of the end customer(s).
G	Abbrieviation for "Gbps" – short for Gigabits per second and used to indicate data transfer speed
ICE	Intercontinental Exchange Group, Inc., parent of NYSET, NYSE Group and its affiliates
Internet	The public collection of networks commonly known as the Internet, originally conceived and implemented by the Department of Defense and public universities as the ARPANet.
IPSec VPN	A standard for Virtual Private Networks that uses the network cryptographic protocols for protecting IP traffic to provide an encrypted, secure tunnel for IP data traffic across a non-secure public extranet or the Internet.
LCN	Liquidity Center Network, used by Colocation customers to connect to financial services housed within the ICE:NYSE Mahwah Data Center.
Liquidity Center	A trading environment that houses NYSE matching engines and/or Colocation customers. Customers who colocate at a Liquidity Center can connect to ICE Global Network services and house their financial servers in Colocation cabinets.
LAN	Local Area Network: A network of machines generally limited to a local area, such as one or more floors of a building, or nearby buildings.
LSP	Limited Service Port: An HA port that allows access to a single NYSE non-core service.
M	Abbrieviation for "Mbps" – short for Megabits per second and used to indicate data transfer speed
MAN	Metropolitan Area Network: A collection of LANs that would otherwise be a Wide Area Network (WAN), but which is local to a single metropolitan area.
NIC	Network Interface Controller, also known as a network card. A hardware component for servers that faciliatates network connections
NOC	Network Operations Center
NMS	National Market Systems: Provides consolidated equity and options market data for the US financial markets to the financial industry.
NYSE	New York Stock Exchange

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2019. All Rights Reserved.

Acronym/Term	Meaning
NYSET	or "**NYSE Technologies Connectivity**" is NYSE Technologies Connectivity, Inc and the operating entity of the USLC and the ICE Global Network
OCx	Optical Carrier level x: The Synchronous Optical Network (SONET) includes a set of signal rate multiples for transmitting digital signals on optical fiber. The base rate (OC-1) is 51.84 Mb.
Packet Filtering	A technology that inspects packets as they enter a piece of networking equipment, such as a router, and take action on the packet (such as to discard, forward, or log it) based on a preconfigured rule set.
PIM	Protocol Independent Multicast: The protocol used by ICE Global Network to route multicast packets.
POD	See Data Hall
Production Network	A network supported by ICE:NYSE which directly supports the trading functionality and/or core business of one of internal ICE:NYSE's business owners.
Proximity Center	An infrastructure location where a customer can connect to ICE Global Network services, rent cabinets to host financial servers, and rent RU space to host network kit.
Public Extranet Provider	See Extranet Provider.
Services	Applications provided for customer's consumption by the Production Networks connected to ICE Global Network.
HA Access Center	A physical facility, usually a Access Center, where ICE:NYSE hosts HA equipment and where customers may gain direct network access to High Availability.
SLC	IP Liquidity Center
SONET	Synchronous Optical Network: A standard for optical telecommunications transport formulated by the Exchange Carriers Standards Association (ECSA) for the American National Standards Institute (ANSI). SONET bandwidth is divided into OCx levels
TCP	Transport Control Protocol: A connection oriented IP Transport layer protocol.
UDP	User Datagram Protocol: A connectionless IP transport layer protocol. Primarily used by ICE Global Network to transport IP multicast data.
VLAN	Virtual Local Area Network: A networking standard that allows network devices, sometimes even those that span multiple Layer 2 switches, to appear as if they all reside upon a traditional shared media Ethernet segment.
WAN	Wide Area Network: A network connectivity model using protocols to support distances greater than a MAN or LAN.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2019. All Rights Reserved.

Appendix C. Quick Connect Sheet – High Availability

The following is the list of information High Availabiluty Direct Connection customers need to consider when configuring their routers.

1. Upon receiving approval to connect to ICE Global Network, customers will be provided with provisioning information pertinent to the services to which they have been requested to be entitled. This list will be supported by a Customer Technical interchange (CTI) Meeting and will be provided by a Customer Engineering representative. Detail will include:
   - The VLAN IDs associated with each set of services to which the customer is entitled.
   - The IP addresses of servers for each service network to which the customer will route unicast datagram's (all of which will be globally registered IP addresses), including all relevant UDP and TCP port assignments.
   - Summary IP ranges of FSNs advertised to the customer via BGP-4 over each service VLAN.
   - List of BGP communities associated with BGP routes announced to the customer for each service. This gives customers the ability to customize routing to FSNs within their networks according to their needs.
   - Multicast group addresses associated with the services to which the customer is entitled. This will include the UDP destination port assignments as applicable.
   - IP addresses of FSN subnets where multicast sources are located.
   - HA US registered AS number**(26585).**
   - The private IP addresses for use on the connection between customer's router and the HA edge router; this will include separate addresses for each of the logical interfaces (each logical interface is required for each VLAN and each will require its own set of unique addresses)
   - BGP passwords (MD5) will be supported but are not required and will be administered by Customer Engineering

2. Customers will be required to provide Customer Engineering with the following network-related information for configuring the HA edge router port:
   - Summary IP addresses of subnets within customer's network which will be advertised by customer's routers into HA network via BGP.
   - Customers' host IP addresses to which unicast IP services will be routed. If customers' cannot provide globally registered addresses, ICE will provide private address ranges for use by the requesting customer only.
   - Customers will provide Customer Engineering with a registered AS number or ICE will provide the customer with a private number to use for exchanging BGP information with HA ONLY. This is not to be confused with the HA AS number.

3. With respect to PIM Sparse-Dense Mode, HA uses all default values where they apply (see Example L3 Switch Configuration for an example configuration). With respect to BGP Parameters, BGP Timers for each customer's direct connection to HA must NOT be set lower than following values:
   - Keep-alive interval – 6 sec
   - Time-out interval – 20 sec.

4. With respect to RIP2 parameters, recommended minimal values for RIP-2 timers are:
   - Update interval – 30 sec
   - Timeout interval – 75 sec.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2019. All Rights Reserved.

Customers who configure their routers with other parameter values will risk interoperability issues. A separate logical interface will be required for each VLAN to which the customer will be connecting. On the VLANs supporting unicast services, BGP will be used for the exchange of unicast routing information between HA and customer's network. On the VLAN dedicated for multicast service delivery, RIP2 is the protocol currently used for exchanging unicast routes associated with the multicast sources. It is assumed, (but not required), that the customer will deploy PIM Sparse-Dense mode with Auto-RP enabled, and use the unicast route information learned via RIP2 for the purposes of routing multicast packets.

For customers who request it, ICE Global Network will configure static IGMP Joins on the HA edge routers connected to the customer. Customers who do not implement PIM Sparse-Dense mode with Auto-RP enabled will find this useful for supporting static "always on" forwarding of multicast data across the HA demarcation to customer's edge router. Routing information about the sources of multicast data will be provided via RIP-2.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2019. All Rights Reserved.

Appendix D. Sample – Layer3 Switch Configuration

The information presented here is in no way meant to imply or represent a certification or recommendation. Customers must make their own evaluations and work with their vendor of choice regarding the solution needed to meet the interface requirements of HA. The configuration presented here was created for a typical Cisco device capable of connecting to HA with the following considerations and assumptions:

- the device was configured to connect to all the HA VLANs
- the typical example of a customer who will be receiving both unicast and multicast data
- assumes the Layer 3 switch is connected to a HA edge router via a single 1000Base-SX connection (Port 25) and to the members internal network with a 1000Bast-T connection (Port1)

```
-------------------------Configuration file example begins below---------------------------
version 12.2
no service pad
service password-encryption
!
switch 1 provision ws-c3750g-24ts-1u
vtp mode transparent
ip subnet-zero
ip routing
no ip domain-lookup
!
ip multicast-routing distributed
!
no file verify auto
spanning-tree mode pvst
spanning-tree extend system-id
!
vlan internal allocation policy ascending
!
vlan 10-14,16-21,152,252
!
interface GigabitEthernet1/0/1
 description Member side of interface (not routing with HA)
 no switchport
 ip address 192.168.126.26 255.255.255.252
 ip accounting output-packets
 ip pim sparse-dense-mode
 ip rip advertise 5
 ip dvmrp metric 1
 ip dvmrp unicast-routing
 ip igmp query-interval 120
 load-interval 30
 keepalive 30
 speed 1000
 duplex full
!
interface GigabitEthernet1/0/2
interface GigabitEthernet1/0/3
interface GigabitEthernet1/0/4
interface GigabitEthernet1/0/5
interface GigabitEthernet1/0/6
interface GigabitEthernet1/0/7
interface GigabitEthernet1/0/8
interface GigabitEthernet1/0/9
interface GigabitEthernet1/0/10
!
interface GigabitEthernet1/0/11
!
```

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2019. All Rights Reserved.

```
interface GigabitEthernet1/0/12
!
interface GigabitEthernet1/0/13
!
interface GigabitEthernet1/0/14
!
interface GigabitEthernet1/0/15
!
interface GigabitEthernet1/0/16
!
interface GigabitEthernet1/0/17
!
interface GigabitEthernet1/0/18
!
interface GigabitEthernet1/0/19
!
interface GigabitEthernet1/0/20
!
interface GigabitEthernet1/0/21
!
interface GigabitEthernet1/0/22
!
interface GigabitEthernet1/0/23
!
interface GigabitEthernet1/0/24
!
interface GigabitEthernet1/0/25
 description Gigabit Ethernet WAN connection to HA
 switchport trunk encapsulation dot1q
 switchport trunk allowed vlan 10-14,16-21,152,252
 switchport mode trunk
 load-interval 30
 speed nonegotiate
 no cdp enable
!
interface GigabitEthernet1/0/26
!
interface GigabitEthernet1/0/27
!
interface GigabitEthernet1/0/28
!
interface Vlan1
 no ip address
 shutdown
!
interface Vlan10
 description VLAN connection to multicast Virtual Backbone
 ip address 10.129.6.1 255.255.255.252
 ip pim sparse-dense-mode
 ip dvmrp metric 1
 ip igmp query-interval 120
 load-interval 30
!
interface Vlan11
 description VLAN connection to Unicast Virtual backbone
 ip address 10.129.14.1 255.255.255.252
 ip pim sparse-dense-mode
 ip dvmrp metric 1
 ip igmp query-interval 120
 load-interval 30
!
router bgp 65221
 no synchronization
 bgp log-neighbor-changes
 network 198.140.52.3
 aggregate-address 10.53.0.0 255.255.224.0 as-set summary-only
```

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2019. All Rights Reserved.

```
 aggregate-address 204.200.184.0 255.255.248.0
 timers bgp 6 20
 redistribute connected
 redistribute static
 redistribute rip
 neighbor HA peer-group
 neighbor HA remote-as 26585
 neighbor HA distribute-list 102 out
 neighbor 10.129.6.2 peer-group HA
 neighbor 10.129.14.2 peer-group HA
no auto-summary
!
ip classless
ip http server
!
ip pim rp-address xxx.xxx.xxx.xxx Static RP Configuration option
!
ip access-list standard Multicast-Cash-Feed
 permit 233.54.12.243
 permit 233.54.12.242
 permit 233.54.12.241
 permit 233.54.12.240
  deny   any
-------------------------Configuration file example ends above---------------------------
```

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2019. All Rights Reserved.

Appendix E. Sample – Layer3 Designated Market Maker Connectivity

Designated Market Makers (DMMs) are customers that have accepted a special obligation to maintain a fair and orderly market on the NYSE and AMEX Equities markets. It is expected that, in order to maintain market availability, the DMMs must be able to function with the same technical redundancy characteristics as the markets themselves. In order to achieve this goal, ICE Global Network has provided this specification to outline the minimum configuration expected for DMM connectivity.

In this addendum, the text refers to USLC connectivity options, including LCN, High Availability, and Liquidity Center Cross Connects.

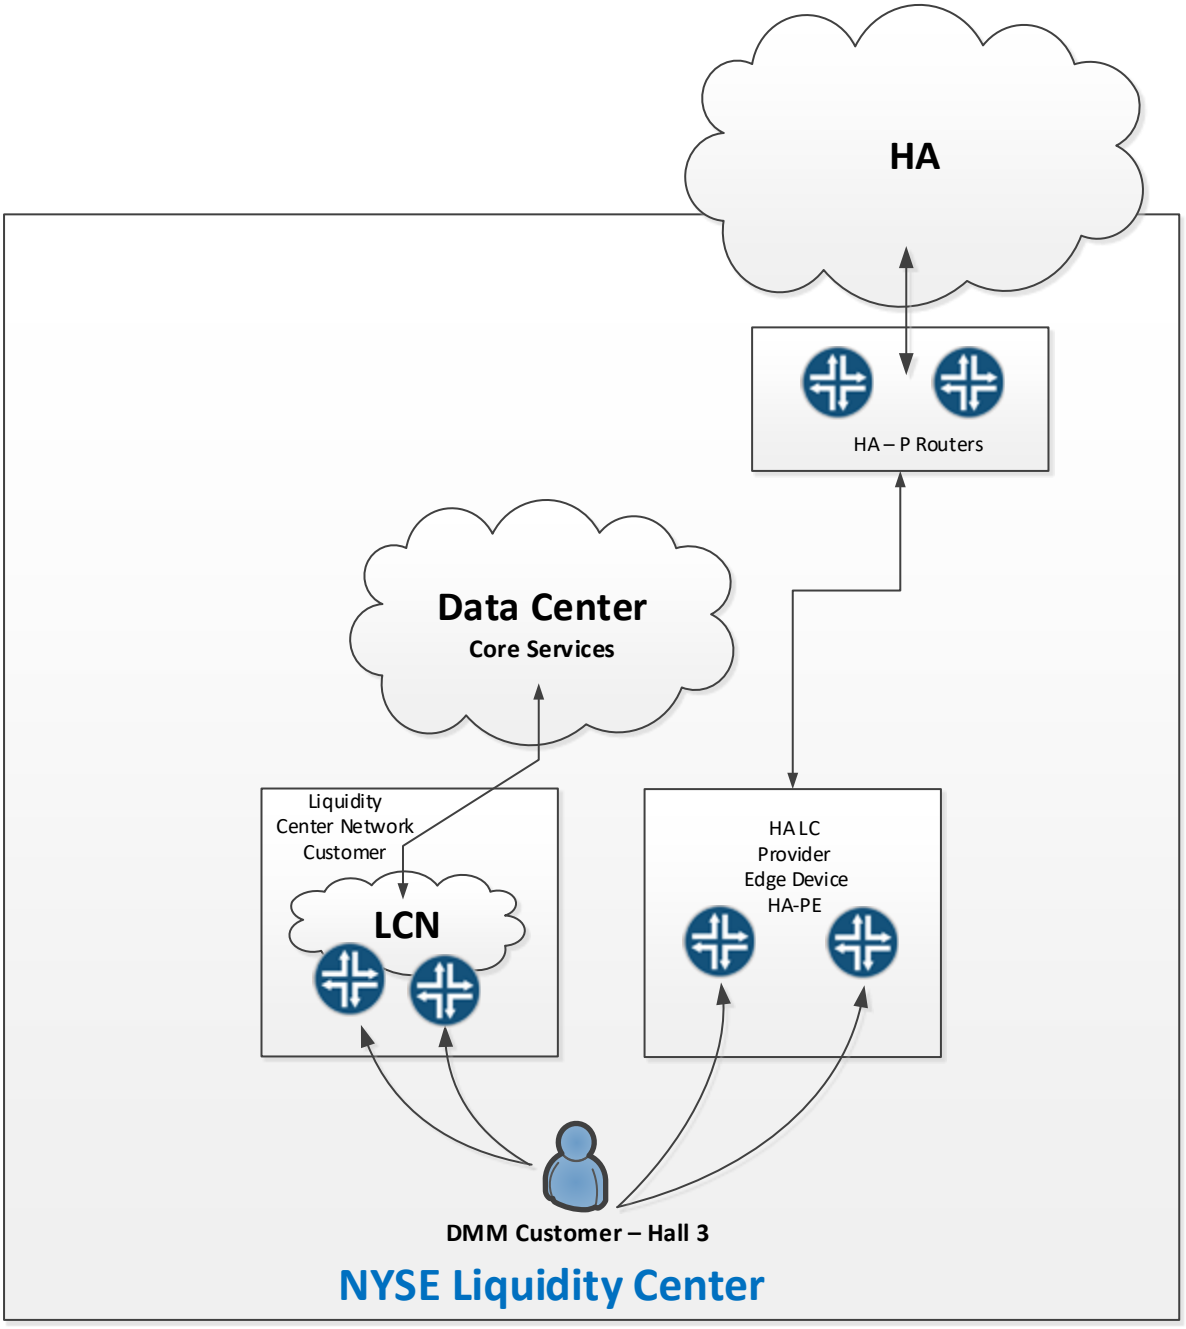

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2019. All Rights Reserved.

(Figure 14) – DMM Connectivity Example

NYSE AMEX DMMs are required to occupy cabinets in the USLC Customer Colocation Hall (Hall 3) for recovery purposes or should be able to demonstrate that they have adequate backup capabilities to operate their DMM business through an offsite customer location. Exceptions to these guidelines will be reviewed on a case by case basis and must be approved by the relevant market operator group. Customers are required to have at a minimum one SLC or LCN connection in Hall 3 or to be used for access to NYSE's trade plant. Access to the DMM's remote office can be configured through SLC, or Optic services. DMM's shall not share their LCN trading connections with other non DMM businesses either Supplementary Liquidity Provider (SLP) or proprietary.

As a general rule, DMM's shall not colocate, non-DMM equipment (customer businesses, prop business) in their production pod cabinets. Exceptions will be reviewed on a case by case basis and must be approved by the relevant market operator group. DMM's are responsible for maintaining their own resiliency across their primary and backup environments.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2019. All Rights Reserved.

Appendix F. Data Center Cabling & Installation Guidelines

These data center racking, power and cabling guidelines were developed to establish a baseline of quality and workmanship within Intercontinental Exchange data center cabinets. The guildelines apply to all ICE Data Center and Access Center locations and are intended to improve communication between ICE Data Center Operations staff, Customers and their designated Customer Representatives (including engineers and installers). They maintain a level of expectation for data center engineering and installation services performed and while not intended to cover every situation or special condition that an engineer or installer may encounter, nor to be used instead of applicable codes and standards, they do provide a tool for use alongside relevant codes and standards, outlining minimum standards in terms of quality of work for installations. The guidelines should be read in conjunction with the USLC Colocation Policies available at https://www.theice.com/data-services/global-network and when Data Center Operations staff are able to to clarify guidelines or to provide a ruling on quality and workmanship compliance.

General

- All equipment and materials used within the data center shall be either (a) listed by the Underwriters Laboratories, Inc. (UL) and other Nationally Recognized Testing Laboratory (NRTL) or (b) inspected and approved by the local Authority Having Jurisdiction (AHJ).
- All equipment and materials shall be manufactured and installed in accordance with applicable codes and regulations including but not limited to ANSI, ASME, FM, IEEE, NEC and NEMA standards.
- All equipment and materials will be used in accordance with the manufacturer's instructions or technical manuals.
- All equipment and materials shall be marked with the manufacturers name, trademark or other descriptive marking by which the organization responsible for the product may be identified.
- All equipment and materials shall be marked with the voltages, current, wattage or other ratings as necessary.
- All equipment shall be free from recognizable hazards that are likely to cause death or serious physical harm.
- All installation work shall be performed in a neat and workmanlike manner.
- During and post installation work, visitors shall practice "good housekeeping" by keeping the work area clear of all obstructions – detail of items to be adhered to are outlined in the ISLC Colocation Service Policy document
- Visitors to all ICE Data Center and Access Center locations shall follow and obey the directions on all signs.
- When onsite, Customers shall adhere to all Intercontinental Exchange Critical Site Work Rules. outlined below
- Customers must report any unsafe or hazardous conditions to the Data Center operatorations staff immediately.

Qualified Personnel

- All data center installation work shall be performed by qualified personnel who have the skills and knowledge related to the specific work method they are tasked with performing.
- Qualified personnel shall have received appropriate training to recognize and avoid the hazards that may be present with respect to that equipment or work method they are performing.
- Work shall be performed by a licensed or certified installer when required by local jurisdiction.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2019. All Rights Reserved.

- All electrical branch circuit installation work up to the final service outlet supporting the IT cabinet shall be performed by the Data Center Operator's own personnel.

Equipment Mounting

- All IT kit shall be installed in the data center cabinet/rack plumb and level true as intended and secure. All of these factors shall be immediately apparent.
- All fasteners or supports used in mounting the IT kit shall be sufficient to substantially secure the equipment in place to the data center cabinet/rack.

Power Cabling

- Only approved and properly maintained equipment line/power cords that have no exposed live parts, exposed ungrounded metal parts, damage, fraying or splices are to be used in installations.
- Cabinets shall be clearly labeled on the outside rear of the cabinets where three phase power circuit lines cords have been installed.
- All line cords shall be rated at or above the current capacity and voltage required to continuously power the device served.
- All line cords shall be suitable for the temperature, conditions, and location where installed.
- All line cords shall be provided with a means of strain relief so that a pull on the flexible line cord will not be transmitted directly to the wiring terminations.
- Line cords, plugs or cord caps that have different electrical ratings shall not be interchangeable with one another.
- Line cords with a ground conductor that has less current-carrying capacity than the other conductors shall not be allowed.
- Line cords that have the ground pin cut off or that have had the ground protection compromised in any way shall not be allowed.
- Adaptors designed to defeat the grounding connection are not allowed.
- Equipment line cords may not be daisy chained (i.e., to plug one power cord into another power cord).
- Equipment line cords shall only be powered from an electrical receptacle located in the same cabinet as the IT device that the line cord is supporting.
- A line cord that ends with a splitter or "Y" may not feed separate devices or other line cords.
- Insert plugs fully so that no part of the prongs are exposed when the line cord is in use.
- The length of equipment line cords within cabinets shall be sufficient to neatly train the line cord from the receptacle to the device served while minimizing line cord coils and loops within the IT cabinet/rack.
- All equipment line cords shall be sufficiently supported using devices intended for the purpose.
- The use of extension cords in any application is strictly prohibited with data center cabinets.

Rack Mount Power Distribution Units (PDU) [Powerstrips]

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2019. All Rights Reserved.

- A PDU shall be capable of being readily installed and wired as intended.
- The inherent design of a PDU shall ensure the electrical coordination between the Data Center Operator provided branch circuit service outlet and the PDU.
- A PDU with an external grounding stud shall be bonded to the data center cabinet ground with a conductor sized in accordance with the local electrical code.
- Each PDU shall be electrically connected to a separate and distinct permanently installed Data Center Operator provided branch circuit service outlet.
- Dual supply PDUs with two separate and distinct power circuits within the same PDU enclosure shall be prohibited unless each of the power circuits terminate in separate, fully electrically segregated partitions within the PDU.
- All PDUs shall be plugged into the Data Center Operator provided service outlet by the Data Center Operator's own personnel.
- PDUs are not to be daisy chained to one another or to separate equipment line cords.
- Electrical contact shall be reliably maintained at any point at which a connection is made between current-carrying parts.
- A PDU shall have all live parts protected against exposure to contact by persons when the PDU is assembled and installed as intended.
- PDU receptacles shall be constructed so that a standard attachment plug of the same configuration and with maximum length blades is capable of seating properly without exposure of the blades between the plane of the face of the plug and the plane of the rim of the PDU receptacle.
- A PDU with integral fuse protection shall be constructed to ensure the enclosure can confine the effects of a fuse rupture to the interior of the enclosure.
- A PDU with integral fuse protection shall be constructed to ensure that no electrically live parts are exposed to contact by persons when a fuse is being removed or replaced.
- A PDU with integral fuse protection shall be constructed to provide for a fuse in each ungrounded conductor.

Rack Mount Transfer Switches (TS)

- A TS shall be capable of being readily installed and wired as intended.
- TS line cords should be permanently affixed to and terminated within the enclosure of the TS. Where a TS is supplied with a removable line cord it shall only be approved for installation where the cabinet that it supports feeds only single phase equipment loads.
- Each TS shall be electrically connected to a separate and distinct permanently installed Data Center Operator provided branch circuit service outlet.
- All TSs shall be plugged into the Data Center Operator provided service outlet by the Data Center Operator's own personnel.
- Unless approved by the local AHJ, TSs are not to be daisy chained to one another, from a rack mount PDU receptacle or to separate equipment line cords.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2019. All Rights Reserved.

- Electrical contact shall be reliably maintained at any point at which a connection is made between current-carrying parts.
- A TS shall have all live parts protected against exposure to contact by persons when the TS is assembled and installed as intended.
- TS receptacles shall be constructed so that a standard attachment plug of the same configuration and with maximum length blades is capable of seating properly without exposure of the blades between the plane of the face of the plug and the plane of the rim of the TS receptacle.
- A TS with integral fuse protection shall be constructed to ensure the enclosure can confine the effects of a fuse rupture to the interior of the enclosure.
- A TS with integral fuse protection shall be constructed to ensure that no electrically live parts are exposed to contact by persons when a fuse is being removed or replaced.
- A TS with integral fuse protection shall be constructed to provide for a fuse in each ungrounded conductor.

Critical Site Work Rules

- All vendors, contractors and service personnel are to be appropriately attired and act in a professional manner.
- Offensive, abusive or other inappropriate behavior by customers, customer representatives, vendors, contractors or service personnel will result in immediate and permanent dismissal from the site.
- Fire exits are to be kept clear.
- Smoking is not permitted in critical site spaces.
- Eating or drinking is not permitted in critical site spaces.
- Energized equipment IS NOT PERMITTED to be turned off any unless directed to do so by the Datacenter Operations Team.
- Non-UPS electrical outlets are only to be used if/when as directed by ICE Datacenter Operations.
- Do not place or lean anything on or against any computer equipment, UPS, PDU, air conditioner, fire system pull station, live electrical panels or similar devices as identified by Intercontinental Exchange.
- When working in the computer and communications rooms do not remove more than 10-15 floor tiles at a time.
- Use safety cones, barricades, caution tape and other safety equipment/devices to direct people away from open floor tiles or other hazardous areas.
- Do not remove floor tile stringers unless absolutely necessary.
- Do not step on cables, conduit or electrical boxes under any raised floor.
- Keep cables away from air conditioner valves, strainers, water and drain lines, fire system smoke heads, piping and other MEP equipment.
- Fire-seal all openings around conduit and cable penetrations between different fire zones.
- All vacuums used in critical spaces must have a HEPA filter on the discharge.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2019. All Rights Reserved.

- No metal cutting in the computer and communication rooms. Metal cutting in other spaces must be performed in a manner that will contain the dissipation of metal filings and be approved by Intercontinental Exchange.
- The use of open flame cutting tools IS NOT permitted.
- Gunpowder discharge activated construction tools or devices ARE NOT permitted.
- At the completion of the job, remove all tools and garbage from the site and where applicable verify that all raised floor tile stringers and floor tiles are secure, straight and level.

This material may not be reproduced or redistributed in whole or in part without the express, prior written consent of Intercontinental Exchange, Inc.
© Copyright Intercontinental Exchange, Inc. 2019. All Rights Reserved.